


# Slim Oyster Ceiling Light Installation Instructions




## Product Specifications

|                   |  |                        |                        |
|-------------------|--|------------------------|------------------------|
| Model No.         | HV5877T-WHT                                    | HV5878T-WHT            | HV5879T-WHT            |
| Name              | Slim   |                        |                        |
| Material          | Aluminium + Polycarbonate Diffuser             |                        |                        |
| Colour            | White  |                        |                        |
| Installation Type | Ceiling - Surface Mounted                      |                        |                        |
| IP Rating         | IP54   |                        |                        |
| Input Voltage     | 240v AC  |                        |                        |
| Protection Class  | 2 (No Earth Required) <input type="checkbox"/> |                        |                        |
| Lamp Base         | Built in LED                                   |                        |                        |
| Lamp Wattage      | 1x 24w   | 1x 30w                 | 1x 40w                 |
| Colour Temp       | TRI Colour - 3000k, 4000k, 5500k               |                        |                        |
| Lumens            | 2000lm, 2100lm, 2200lm                         | 2600lm, 2700lm, 2800lm | 3600lm, 3700lm, 3800lm |
| CRI               | > 80   |                        |                        |
| Dimmable          | Yes - Triac Dimmable                           |                        |                        |
| Warranty          | 3 Years Replacement*                           |                        |                        |


### HV5877T-WHT Dimensions

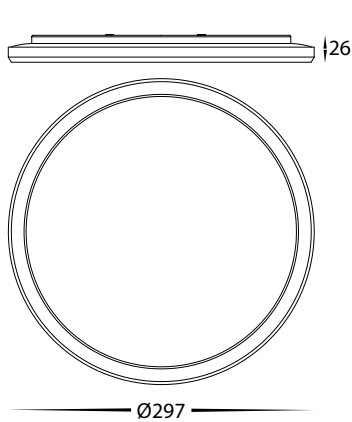

### HV5878T-WHT Dimensions

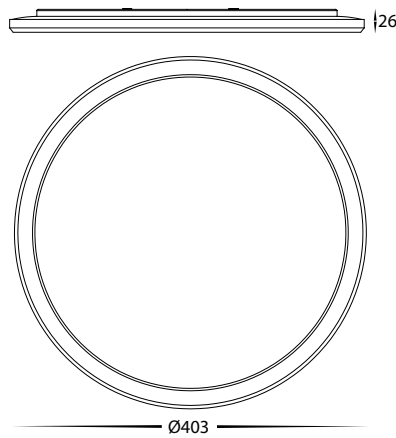

### HV5879T-WHT Dimensions

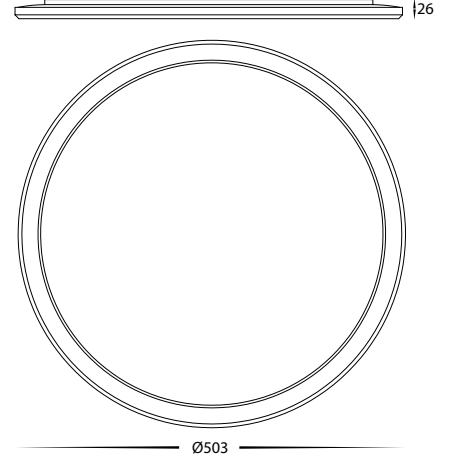

## Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- If installed on surface other than ceiling eg. Wall, IP Rating downgrades to IP20.
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

## Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove base plate from fitting by twisting anti clockwise.
3. Insert cable through centre hole of fitting
4. Install base plate to ceiling in desired location using appropriate screws for application.
5. Connect the cable - connect live and then neutral wire.
6. Fitting is preset to 3000k, to change slide switch located in base of fitting to desired colour temperature.
7. Reattach fitting to base plate making twisting clockwise until fitting is locked into place.
8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

## Must be installed by a licensed electrician

### Contact Details:

143 Beauchamp Road  
Matraville NSW 2036  
Australia

Tel: 02 9381 8300  
Fax: 02 9666 8881  
Email: sales@havit.com.au  
Web: www.havit.com.au

### Warranty Terms & Conditions\*



### Additional Information

