



Scan to explore
XDMS25 online

Midiled XDMS25

25W Adjustable Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Insert Colour	Driver
XDMS25	2.7 (2700K)	(CRI 90+ Standard)	MB (Medium)	W (White)	WI (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	WB (Wide)		BI (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)			SI (Silver)	
	4 (4000K)				GI (Gold)	

Order Code **XDMS254-WB-W-WI-LT**



To configure this downlight, please visit
trendlighting.com.au/product/midiled-XDMS25

Product Features

- Recessed adjustable LED downlight with front collimator lens and lower profile, characterised by its quality, light efficiency and performance
- Manufactured with an aluminium body and powder coat finish
- Large pin fin heatsink for optimal thermal management
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver


Product Attributes



Physical Characteristics

Trim Colour	White
Insert Colour	White Black Silver Gold
Tilt Angle	25°
Dimensions	Ø150 x 85 (H) mm
Spring Height	35 mm
Cutout	Circular 120 mm
Weight	505 g

Dimensions (mm)

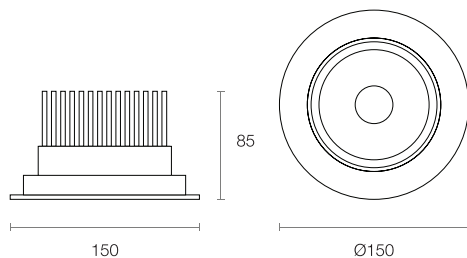

 Cutout Ø120 mm

Technical Characteristics

Based on XDMS254-WB-W-WI-LT

LED Power	25W
LED Type	COB
Lumen Output	2955 lm
Luminous Flux	2228 lm
Efficacy	84.39 lm/W
Colour Temperature	2700K 3000K 3500K 4000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Medium Wide

System Power	26.4W Typical
Driver Model	Trend 150020-700 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-40V DC 700mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge DALI

General Characteristics

Category	Downlights
Family	Midiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20



Scan to explore
XDMS25 online

Midiled XDMS25

25W Adjustable Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Insert Colour	Driver
XDMS25	2.7 (2700K)	(CRI 90+ Standard)	MB (Medium)	W (White)	WI (White)	LT (Leading & Trailing Edge) DALI (DALI)
	3 (3000K)	V (CRI 93+ VIVID)	WB (Wide)		BI (Black)	
	3.5 (3500K)	R (CRI 97+ Standard)			SI (Silver)	
	4 (4000K)				GI (Gold)	

Order Code **XDMS254-WB-W-WI-LT**

To configure this downlight, please visit
trendlighting.com.au/product/midiled-XDMS25

Trim Colour



W
White Trim

Insert Colour




WI
White Insert



BI
Black Insert



SI
Silver Insert



GI
Gold Insert