



Scan to explore  
XRD10 online

# Midiled XRD10

10W Recessed Adjustable Pull-out Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Insert Colour	Driver
XRD10	3 (3000K)	(CRI 90+ Standard)	MB (Medium)	W (White)	WI (White)	LT (Leading & Trailing Edge) DALI (DALI)
	4 (4000K)			B (Black)	BI (Black) SI (Silver) GI (Gold)	

Order Code **XRD104-MB-W-WI-LT**




To configure this downlight, please visit  
[trendlighting.com.au/product/midiled-XRD10](http://trendlighting.com.au/product/midiled-XRD10)

## Physical Characteristics

Trim Colour	White   Black
Insert Colour	White   Black   Silver   Gold
Tilt Angle	90°
Rotation	355°
Dimensions	Ø107 x 117 (H) mm
Spring Height	42 mm
Cutout	Circular 89 mm
Weight	550 g

## Dimensions (mm)

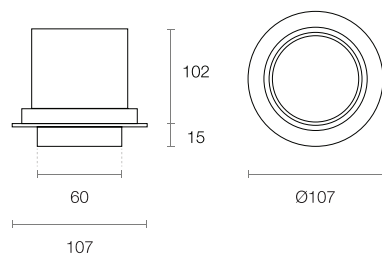

## Product Features

- Recessed adjustable LED downlight with pull-out gimble design in compact size
- Featured with 355° rotation and 90° tilting capabilities, allowing for directional adjustment in a variety of lighting applications
- Configurable with optional coloured inserts, enabling seamless integration with any design aesthetic
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with a remote driver

## Product Attributes



## Technical Characteristics

Based on XRD104-MB-W-WI-LT

LED Power	10W
LED Type	COB
Lumen Output	1778 lm
Luminous Flux	768 lm
Efficacy	65.08 lm/W
Colour Temperature	3000K   4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80)
Beam Angle	Medium

System Power	11.8W Typical
Driver Model	Trend 150015-500 (L&T)
Input	180-265V AC 50/60 Hz
Output	16-20V DC 500mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge   DALI

## General Characteristics

Category	Downlights
Family	Midiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20



Scan to explore  
XRD10 online

# Midiled XRD10

10W Recessed Adjustable Pull-out Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Insert Colour	Driver
<b>XRD10</b>	3 (3000K)	(CRI 90+ Standard)	MB (Medium)	W (White)	WI (White)	LT (Leading & Trailing Edge) DALI (DALI)
	4 (4000K)			B (Black)	BI (Black) SI (Silver) GI (Gold)	

Order Code **XRD104-MB-W-WI-LT**

To configure this downlight, please visit  
[trendlighting.com.au/product/midiled-XRD10](http://trendlighting.com.au/product/midiled-XRD10)

## Trim Colour



W  
**White Trim**



B  
**Black Trim**

## Insert Colour



WI  
**White Insert**



BI  
**Black Insert**



SI  
**Silver Insert**



GI  
**Gold Insert**