



Scan to explore
XDG10 online

Miniled XDG10

10W Recessed Adjustable Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XDG10	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	110V (1-10V)
	4 (4000K)				

Order Code **XDG104-WB-W-LT**




To configure this downlight, please visit
trendlighting.com.au/product/miniled-XDG10

Physical Characteristics

Trim Colour	White Black Silver
Tilt Angle	30°
Dimensions	Ø105 x 90 (H) mm
Spring Height	20 mm
Cutout	Circular 92 mm
Weight	325 g

Dimensions (mm)

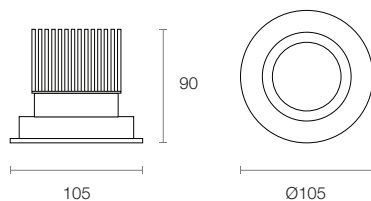

Product Features

- Recessed adjustable LED downlight with exceptional light output and quality
- Curved appearance helps create a seamless ceiling aesthetic
- Manufactured with an aluminium body and powder coat finish
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes



Technical Characteristics

Based on XDG104-WB-W-LT

LED Power	10W
LED Type	COB
Lumen Output	1450 lm
Luminous Flux	1019 lm
Efficacy	87.09 lm/W
Colour Temperature	2700K 3000K 3500K 4000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80)
Beam Angle	Narrow Medium Wide

System Power	11.7W Typical
Driver Model	Trend 150218-300 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-42V DC 300mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge DALI 1-10V

General Characteristics

Category	Downlights
Family	Miniled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	CA90
Ingress Protection	IP20



Scan to explore
XDG10 online

Miniled XDG10

10W Recessed Adjustable Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XDG10	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	110V (1-10V)
	4 (4000K)				

Order Code **XDG104-WB-W-LT**

To configure this downlight, please visit
trendlighting.com.au/product/miniled-XDG10

Trim Colour



W
White Trim



B
Black Trim



S
Silver Trim