



Scan to explore  
XDR10 online

# Miniled XDRL10

10W IP65 Rated Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XDRL10	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	110V (1-10V)
	4 (4000K)				

Order Code **XDRL104-WB-W-LT**



## Product Features

- Deep recessed LED downlight with IP65 rating, known for its thin trim profile and low glare design
- Manufactured with an aluminium body and powder coat finish
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver

## Product Attributes




To configure this downlight, please visit  
[trendlighting.com.au/product/miniled-XDRL10](http://trendlighting.com.au/product/miniled-XDRL10)

## Physical Characteristics

Trim Colour	White   Black   Silver
Dimensions	Ø102 x 122 (H) mm
Spring Height	50 mm
Cutout	Circular 92 mm
Weight	245 g

## Dimensions (mm)

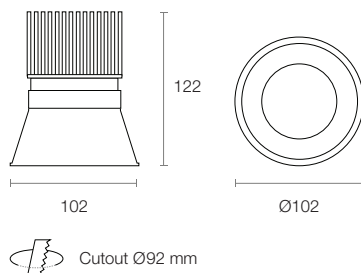

## Technical Characteristics

Based on XDRL104-WB-W-LT

LED Power	10W
LED Type	COB
Lumen Output	1450 lm
Luminous Flux	1036 lm
Efficacy	88.55 lm/W
Colour Temperature	2700K   3000K   3500K   4000K
Colour Technology	CRI 90+   CRI 93+ VIVID   CRI 97+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80)
Beam Angle	Narrow   Medium   Wide
System Power	11.7W Typical
Driver Model	Trend 150218-300 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-42V DC 300mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge   DALI   1-10V

## General Characteristics

Category	Downlights
Family	Miniled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	CA90
Ingress Protection	IP65



Scan to explore  
XDR10 online

# Miniled XDR10

10W IP65 Rated Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
<b>XDR10</b>	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	110V (1-10V)
	4 (4000K)				

Order Code **XDR104-WB-W-LT**

To configure this downlight, please visit  
[trendlighting.com.au/product/miniled-XDR10](http://trendlighting.com.au/product/miniled-XDR10)

## Trim Colour



W  
**White Trim**



B  
**Black Trim**



S  
**Silver Trim**