

### NEO-PRO-25-REC

Date: 05/2023

Variants		Item No.	Colour Temp
Blk	Wht		
20917	20918	NEO-PRO-25-REC	Tri-colour Switchable


Thank you for purchasing your new NEO-PRO-25-REC Downlight, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

### Specifications


Voltage:	240V	Lumen (±5%):	Warm White 3000K - 2250Lm Neutral White 4000K - 2400Lm White 5700K - 2300Lm	Dimmable:	Yes*
Power:	25W	Beam Angle:	90°	IP Rating:	65**
CRI:	≤90	CCT:	3000K - 4000K - 5700K	Lifespan:	50,000hrs

\*Fully dimmable with suitable dimmers.

\*\*IP65 from front only.

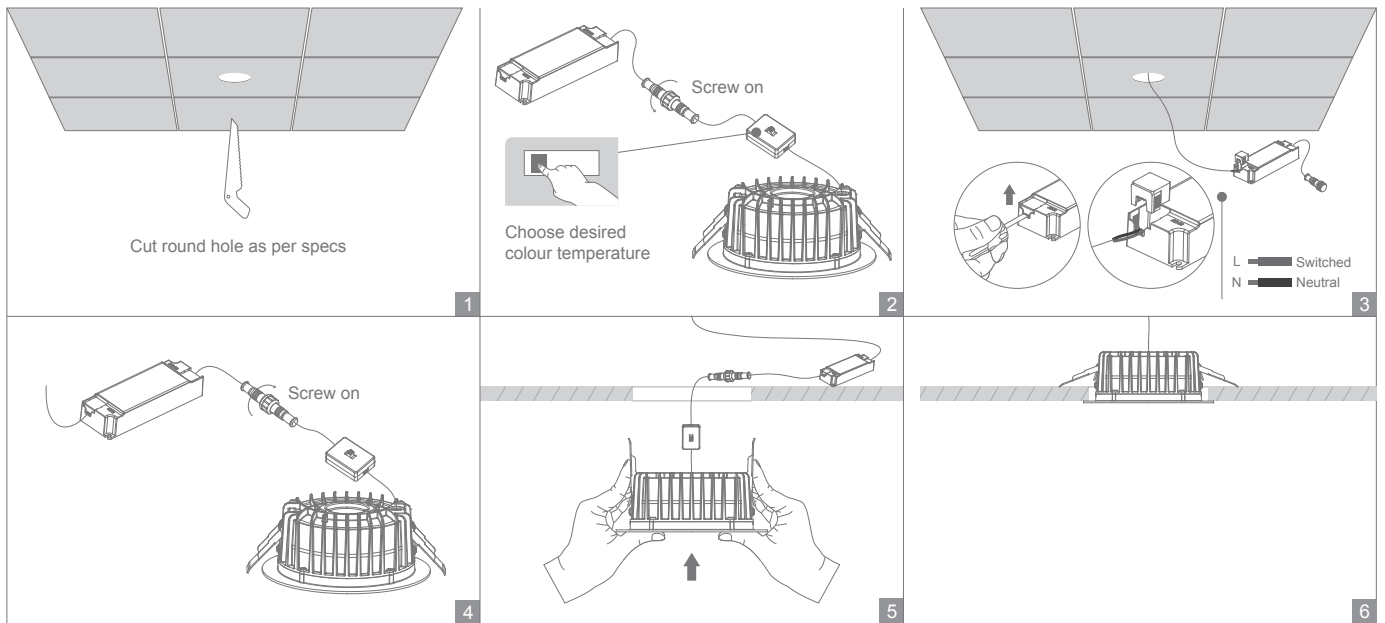

#### Minimum clearance distances to flammable building elements.

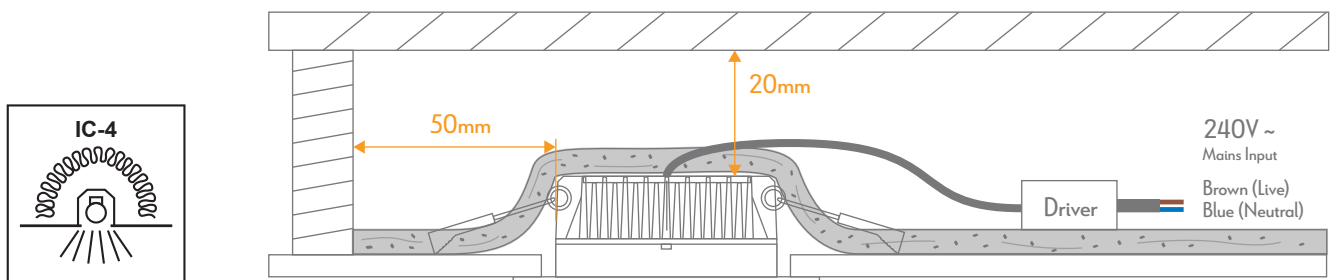

#### Note:

- The LED driver is NOT suitable for covering with insulation material.
- Warning-Risk of overheating or fire if the clearance distances are compromised.
- The flexible cable cannot be replaced, if this cable is damaged the luminaire will need to be replaced.
- The light source of this luminaire is not replaceable; at the end of life the whole luminaire should be replaced.

**Note:** -The lamp must be installed by professional electrician  
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use  
-Keep away from hot steam and corrosive gas