

# Waterproof LED Drivers (IP67)




### Product Features:

- Output voltage: 12V or 24V DC constant voltage
- Input voltage: 240V AC 50/60Hz
- Short circuit/ Overload/ Over temp protection
- 5% excess VA should be allowed




Accessories

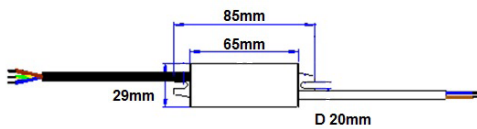


OTTER1 & OTTER24V1 LINE



OTTER24V2 LINE

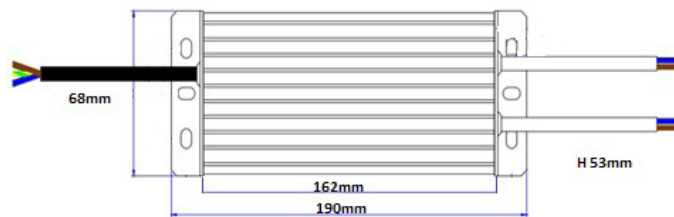

OTTER24V3 LINE

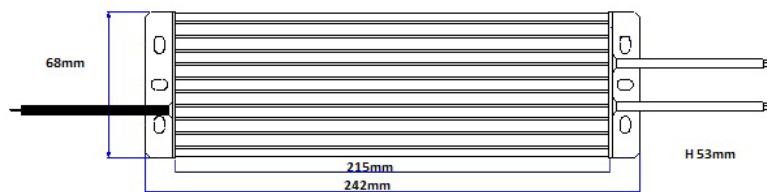

OTTER24V4 LINE

PART NO.	DESCRIPTION	LOAD (W)	TA (°C)	TC (°C)	LENGTH (mm)	WIDTH (mm)	DEPTH (mm)	BOX WEIGHT (kg)	BOX DIMENSIONS (cm)	CARTON QTY
OTTER1	DRIVER LED 12V DC CONSTANT VOLT 1-12W	1.2-9.6	40	80	65	29	20	0.26	23x7x5	1/25
OTTER24V1	DRIVER LED 24V DC C/VOLTAGE 12W	1.2-9.6	40	80	65	29	20	0.32	22.8x7x5	1/25
OTTER24V2	DRIVER LED 24V DC C/VOLTAGE 30W	3-24	40	80	166	30	20	0.38	22.8x7x5	1/25
OTTER24V3	DRIVER LED 24V DC C/VOLTAGE 100W	10-80	40	80	162	68	53	1.06	24.5x11x6.5	1/10
OTTER24V4	DRIVER LED 24V DC C/VOLTAGE 150W	15-120	40	80	215	68	53	1.36	24.5x11x6.5	1/10

\*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)