


New Dimming Technology



RETROFIT LED DIM-TO-WARM GLOBES

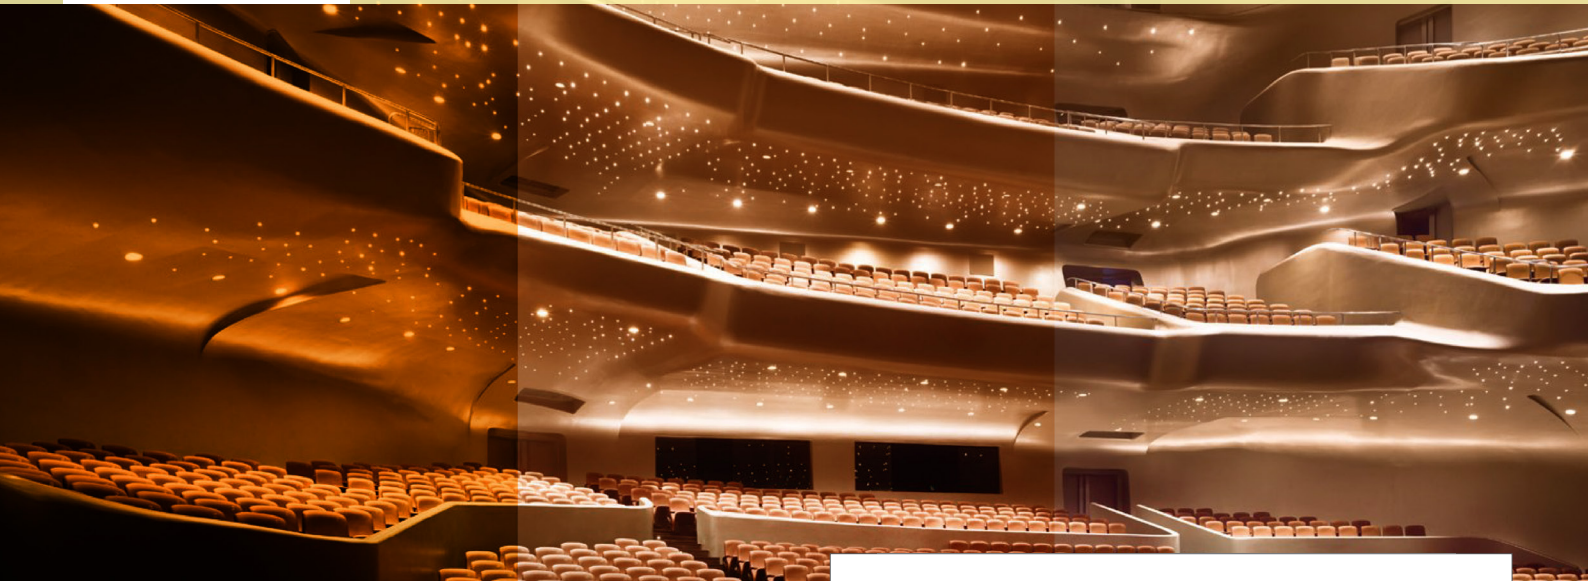

PRODUCT FEATURES

- Input voltage: 240V AC 50/60Hz
- Wattage: 8.2W
- 1pc Sharp COB LED chip
- Power factor: 0.9
- External driver with flex & plug included
- Ambient temp: -25 to 40°C
- **Suitable for dimming**
- **Dimming range: 3000K to 2000K**

50,000  
HRS

BEAM  
60°

IP  
20

3 YEAR  
WARRANTY

DIMMABLE



Dimming Range:  
2000K << 3000K




RECOMMENDED DIMMERS

most trailing edge dimmers and leading edge dimmers

- CLA - LYNX
- DIGINET - DGLCDM400
- Clipsal - 32E450UDM
- LUMEX - LT1D450LSWE
- HPM - XLP450PWEWE
- MARTEC - MTD300VA
- Schneider - SBD315RC
- DOMUS - 20505

Max.15pcs globes per dimmer



CODE	DESCRIPTION	TECHNICAL DATA				DIMENSIONS		PACKAGING		
		KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	LENGTH (mm)	DIAM (mm)	WEIGHT (Kg)	BOX (cm)	CARTON QTY
RETROD	MR16 LED GLOBE REPLACEMENT DIM-TO-WARM	3000-2000	470	8.2	82	70	Ø50	0.32	9.5x9.5x9.5	1/50

Brochure updated on 25.10.2016

