


Adjustable Infrared Motion Sensors

Specification

Part No.	SENS007, SENS008
Mounting Type	Surface Mounted
Input voltage	220-240V 50/60Hz
Detection Range	120°
Detection Distance	12m Max (<24°C)
Motion Detection Speed	0.6-1.5m/s
Rated Load	1200W HAL/ 300W CFL/ 150W LED
Time Delay	Min.10sec±3sec Max.30min±2min (restarts from last movement)
Ambient Light	3-2000Lux
Ambient Temp	-20 to 40°C
Working Humidity	<93%RH
Power Consumption	approx. 0.5W
Installation Height	1.8-2.5m
Housing Material	PC
IP Rating	IP66
Warranty	5 year replacement warranty

New Improved Knuckle



Adjustable Head

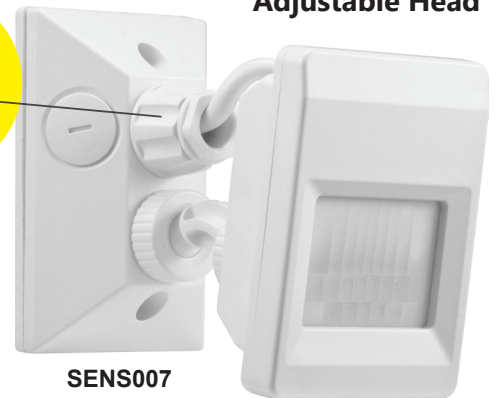

SENS007




SENS008

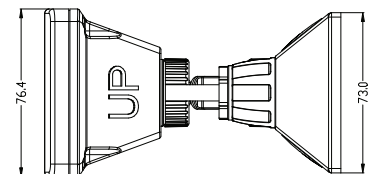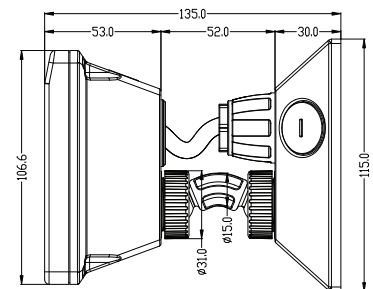


- UV resistant
- 3 wire
- Day/Night recognition
- Manual override

(1) To operate as a light only (i.e. override sensor), turn power off for 3 seconds and then back on


(2) To reverse the override function (i.e. re-introduce the use of the sensor), turn power off for 10 seconds and then back on

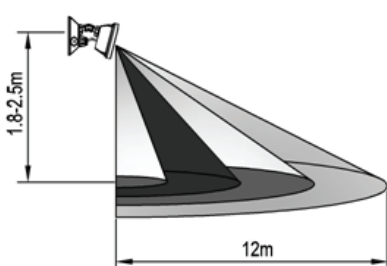

Height of installation: 1.8-2.5m

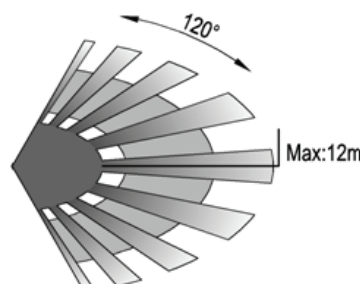

Detection Distance: Max.12m

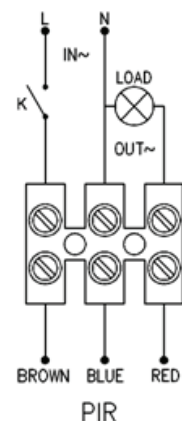

PIR