



BRIGHTSTAR SE7199 - 20/250W

IP65 LED multi-purpose and multi-wattage floodlight range, IK07(20-50) IK08 (100-250)

Application

A versatile solution for residential and commercial exterior spaces

Design Specifications













- Robust die-cast aluminium body
- Five (5) versatile body profiles ranging from 20 - 250 watts
- Durable black powder coated finish
- PC diffuser for 20, 30, 50W models, tempered glass cover 100, 200, 250W models
- Beam distribution 100° (20/30/50watt), 110° (100/200/250 watt)
- Versatile angled bracket for easy installation. Wired with 3 x core rubber flex for faster installation, 20/30/50 models 1m, 100/200 models 1.5m

Performance

- Dimmable - **NO**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SE7199/20WW/BK	240	20	1400	3000	80
	SE7199/20NDL/BK	240	20	1600	5000	80
	SE7199/30WW/BK	240	30	2100	3000	80
	SE7199/30NDL/BK	240	30	2400	5000	80
	SE7199/50WW/BK	240	50	3500	3000	80
	SE7199/50NDL/BK	240	50	4000	5000	80
	SE7199/100WW/BK	240	100	9500	3000	80
	SE7199/100NDL/BK	240	100	9500	5000	80
	SE7199/200WW/BK	240	200	19000	3000	80
	SE7199/200NDL/BK	240	200	19000	5000	80
	SE7199/250WW/BK	240	250	22800	3000	80
	SE7199/250NDL/BK	240	250	22800	5000	80
	SE7099PMB/BK					
	SE7099AMB/BK5					
	SE7099AMB/BK8					
	SE7099AMB/BK10					



Beam Angle (°)	Body Colour	Dim (mm)	Diameter (mm)	Mass (kg)	IPART	VEET
100	Black	158(L) x 132(W) x 28(H)		2.5		
100	Black	158(L) x 132(W) x 28(H)		2.5		
100	Black	210(L) x 168(W) x 36(H)		2.6		
100	Black	210(L) x 168(W) x 36(H)		2.6		
100	Black	282(L) x 223(W) x 37(H)		3		
100	Black	282(L) x 223(W) x 37(H)		3		
110	Black	360(L) x 275(W) x 85(H)		3.9	YES	YES
100	Black	360(L) x 275(W) x 85(H)		3.9	YES	YES
110	Black	510(L) x 386(W) x 106(H)		8.1	YES	YES
110	Black	510(L) x 386(W) x 106(H)		8.1	YES	YES
100	Black	510(L) x 386(W) x 106(H)		8.2	YES	YES
100	Black	510(L) x 386(W) x 106(H)		8.2	YES	YES
	Black	62(W) x 200(H)	62			
	Black	500(L) x 71(W) x 71(H)	71			
	Black	800(L) x 71(W) x 71(H)	71			
	Black	1000(L) x 71(W) x 71(H)	71			

(1) Minimum order quantity applies for 3000K 100-250watt models. (2) Sustainable program approvals (VEET, IPART, REES) are valid only for 100w, 200w and 250w models.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions



Accessories Technical Specifications

Model No.	Description	Dimensions
SE7099FAM/BK	Pole mounting bracket (for SE7199/100 only)	Ø 62 x H 200 mm
SE7099FAM/BKS	Arm mounting bracket	L 500 mm
SE7099FAM/BKS	Arm mounting bracket	L 800 mm
SE7099FAM/BK10	Arm mounting bracket	L 1000 mm

Accessories

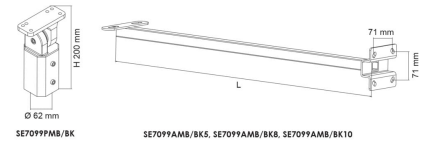

Photometric Data

Unit: cd C0/C180 — C90/C270

SE7199/100WW at 3000K

SE7199/250NDL at 5000K

