



CUSHION SL3247 -12/30W

Dimmable Square IP54 LED Oyster

Application

A perfect choice for apartments or commercial spaces

Design Specifications

- (4) four models to select 12, 18, 25 or 30 watt
- Soft square architectural design, colour white with an opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI > 80, CCT 4000K, optional 3000K and 5700K
- Integral constant current trailing edge dimmable LED driver
- Low profile design, IP54, designed for weather protected (under eave) installations, double insulated.
- Sensor option (non-dimmable) - with integrated microwave motion sensor (SL3247/25 only).



Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge**

In Built Sensor - **OPTIONAL**

Sensor Type - **MICROWAVE**

Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SL3247/25CW	LED OYSTER 12W SQ. IP54 4K WH	240	12	1000	4000	80
SL3247/30CW	LED OYSTER 18W SQ. IP54 4K WH	240	18	1600	4000	80
SL3247/35CW	LED OYSTER 25W SQ. IP54 4K WH	240	25	2400	4000	80
SL3247/40CW	LED OYSTER 30W SQ. IP54 4K WH	240	30	2500	4000	80


Model No.	Body Colour	Dimensions (mm)
SL3247/25CW	WHITE	250(L) x 250(W) x 50(H)
SL3247/30CW	WHITE	300(L) x 300(W) x 40(H)
SL3247/35CW	WHITE	350(L) x 350(W) x 40(H)
SL3247/40CW	WHITE	400(L) x 400(W) x 50(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

SL3247

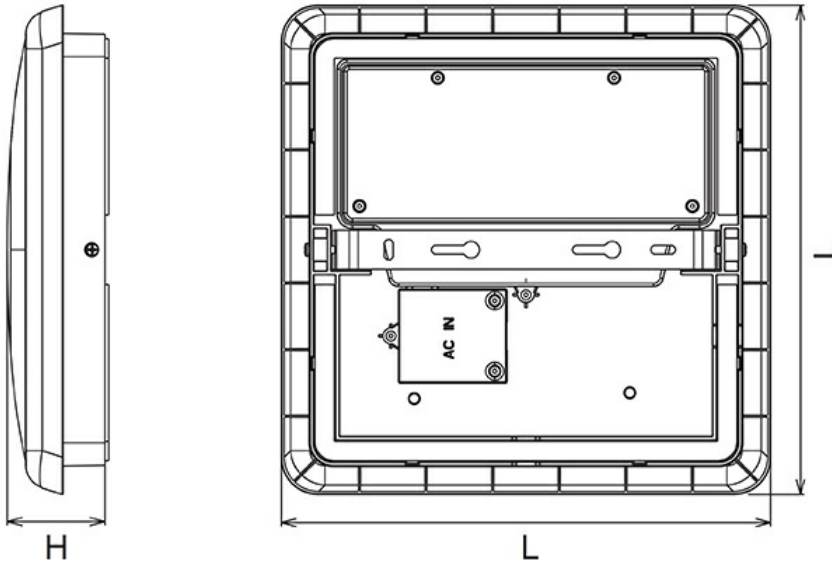




Photometric Data

Unit: cd C0/C180 _____ C30/C210 _____
 cd C60/C240 _____ C90/C270 _____

SL3247/25CW at 4000K

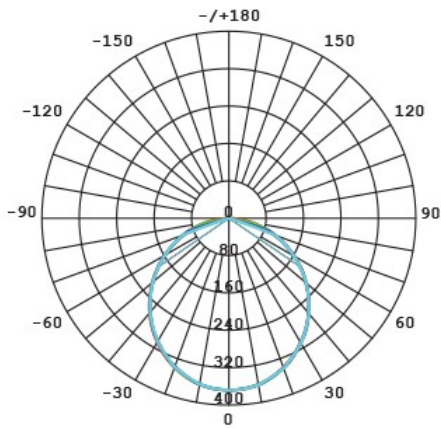

SL3247/40CW at 4000K

