



DIM 75/150W 24V


Australian approved, trailing edge dimmable constant voltage, driver

Application

Reliable constant voltage trailing edge dimmable driver
75 / 150 watt

Design Specifications

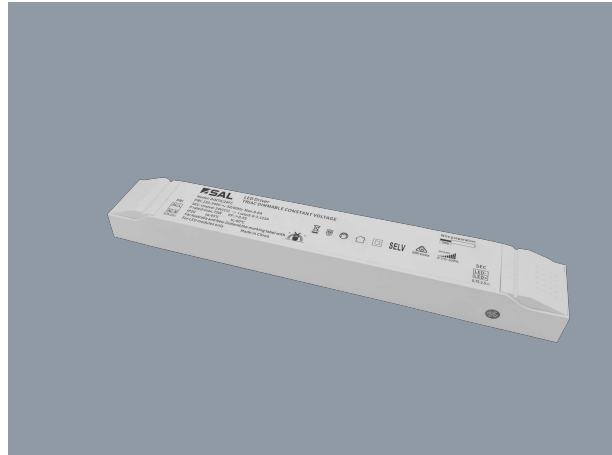

- Choice of 75 watt / 24V, 150 watt / 24V
- Trailing edge dimming control
- Overload and short circuit protection
- SELV and EMC compliant, fixed terminal termination
- flickerCONTROLLED technology
- Electrical class II, Do Not Cover.



Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing or Leading Edge**

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Output Voltage (V/DC)	Power Factor	Power (W)	Dimmable
	DIM75/24V/FC	240	24	0.95	75	YES
	DIM150/24V/FC	240	24	0.95	150	YES

Dim (mm)	
	300(L) x 43(W) x 31(H)
	300(L) x 43(W) x 31(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**DIMMABLE
CONTROL WITH
SFI FLICKER
CONTROL
TECHNOLOGY**
when paired with
SAL SFI downlights



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

