



DIM40/12V

Australian approved IP65 dimmable 12V constant voltage LED driver

Application

Suitable for LED strip, trailing edge dimming models

Design Specifications

- SELV and EMC compliant
- Safe no load operation, 40 watt, minimum load 5 watt, PF >0.9, output 12V
- Overload and short circuit protection
- 1.2 m flex & 2 pin plug fitted (DIM40W), Output fly leads at secondary end
- Recommended SAL trailing edge dimmers SDD350UM, SDD400U, SDA450U, SDD350BT



Performance

Dimmable - **YES**

Dimmer Type - **TRAILING EDGE**


Technical Specification

| Model No. | Input Voltage (V/AC) | Output Voltage (V/DC) | Frequency (Hz) | Power (W) | Power Factor | Dim (mm) |
|-----------|----------------------|-----------------------|----------------|-----------|--------------|------------------------|
| DIM40/12V | 240 | 12 | 50 | 40 | 0.9 | 155(L) x 43(W) x 26(H) |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Wiring Diagram

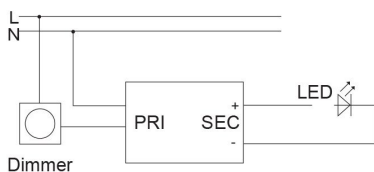

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**DIMMABLE
CONTROL WITH
SFI FLICKER
CONTROL
TECHNOLOGY**
when paired with
SAL SFI downlights



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

