



ECOGEM flickerGUARD S9041TC2 FG - 10W

Dimmable 10 watt LED downlight with selectable CCT and flickerGUARD

Application

Ideal for any residential or commercial interior space, experiencing nuisance ripple induced flicker

Design Specifications

- The innovative flickerGUARD Ecogem responds to both visual and non-visual harmonic induced flicker.
- Trailing edge dimmable LED driver, with smooth dimming performance and flex and plug
- High efficiency LED optics with an opal polycarbonate diffuser
- Selectable CCT 3000K / 4200K / 5700K, CRI>80
- Durable Polyamide, reinforced aluminium body profile and white trim.
- Colour trim options: Black (S9041 BK RING), Silver (S9041 SL RING), Satin Nickel (S9041 SN RING) IC - 4 rated, double insulated



Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9041TC2/WH/FG	240	10	850/1000/900	3000/4200/5700	90


Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
YES	80	WHITE	92	103	40(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions




Dimensions


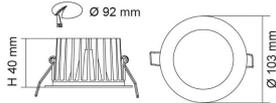


Photometric Data

Unit: cd C0/C180 — C30/C210 —
 cd C60/C240 — C90/C270 —

S9041 TC at 3000K

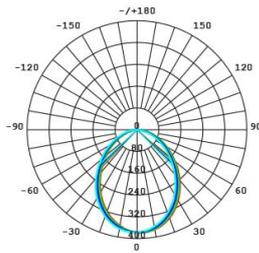

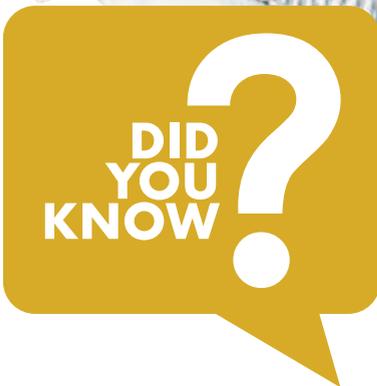

Before selecting a downlight look out for the marks of Compliance and Safety. Starting with the RCM mark, this signals that the product has been tested to all relevant Australian Safety standards, to ensure the product delivers its designed safety performance. In addition and when thermal insulation batts are installed in the ceiling cavity, look out of the IC rating to ensure the product is suitable for such an application.

