



ECOGEM S9041SM/TC - 10W

Surface mount dimmable LED downlight with selectable CCT

Application

Ideal for residential or commercial interior spaces

Design Specifications

- Selectable CCT 3000K / 4200K / 5700
- Precise pressed metal surface mount profile
- White powder coat finish
- SAL S9041TC LED downlight kit included
- High efficiency LED optics with an opal polycarbonate diffuser
- IP20

Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge, optional 1-10V, DALI / DSI**




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9041SM/C TC WH	240	10	850/1000/900	3000/4200/5700	90
Dimmable	CRI	Body Colour	Diameter (mm)	Dim (mm)		
YES	80	WHITE	152	152(W) x 145(H)		

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".




Dimensions





Photometric Data

Photometric Data

Unit: cd C0/C180 C30/C210
cd C60/C240 C90/C270



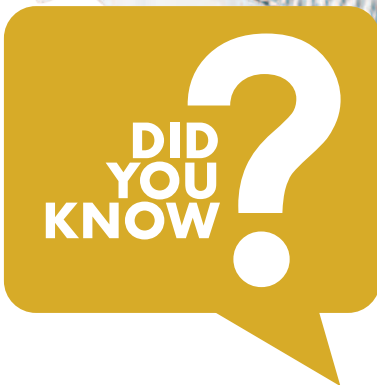

Before selecting a downlight look out for the marks of Compliance and Safety. Starting with the RCM mark, this signals that the product has been tested to all relevant Australian Safety standards, to ensure the product delivers its designed safety performance. In addition and when thermal insulation batts are installed in the ceiling cavity, look out of the IC rating to ensure the product is suitable for such an application.

