



FLEXI FL2415RGB/S-15W/M


RGB 24V low voltage LED Strip IP44

Application

A creative solution for residential and commercial interior spaces

Design Specifications

- High efficiency SMD LED chips with 3M self-adhesive tapes at back
- Roll length 6 m, cuttable every 100 mm at scissors symbol ✂
- Connection length can be extended by certain LED drivers, controllers and repeaters
- RGB colour changeable with compatible controller LT8913RGB, LT8915RGB/BT
- Heat sink and 24V constant voltage LED driver required
- Suitable LED driver - refer web section "drivers"

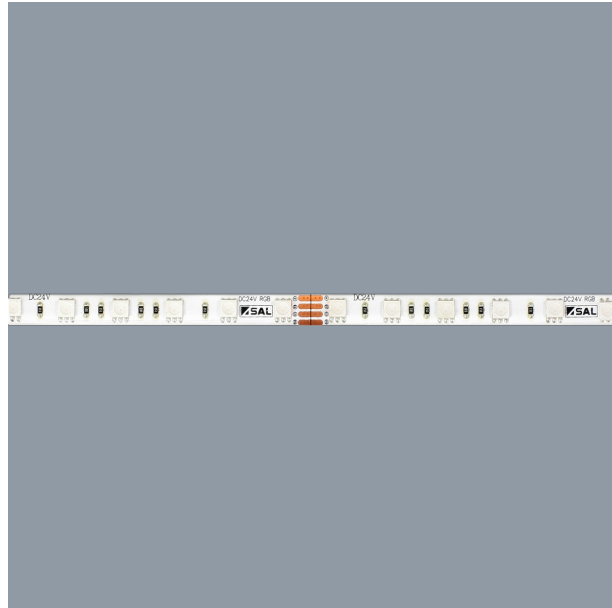

Performance

Dimmable - **YES**


Dimmer Type - **refer dimming options**

Technical Specification

Model No.	Description	Input Voltage (V/DC)	Watts per metre (W/m)	Beam Angle (°)	Dimensions (mm)
FL2415RGB/S	LED STRIP 15W/M 24V IP44 RGB	24	15	115	10(W) x 3.5(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

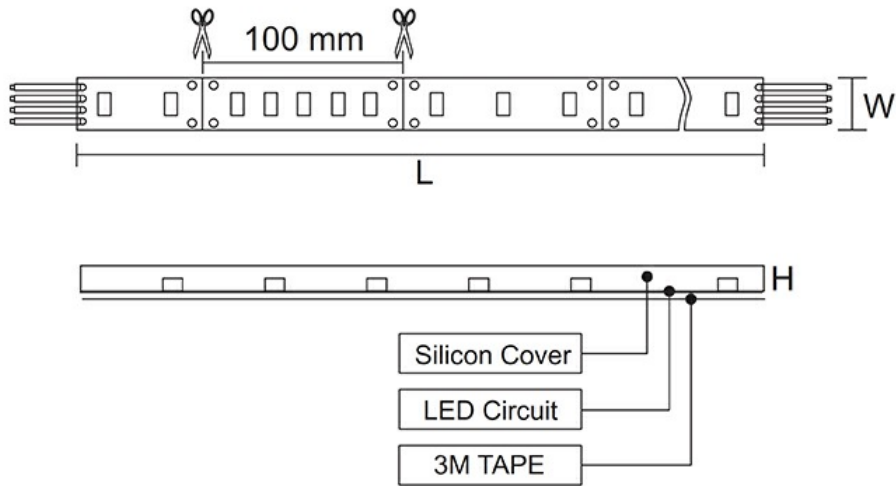

Product Images

