



FLEXI FLH2420-20W/M


Dimmable 24V low voltage, high output LED Strip IP20

Application

A creative solution for residential and commercial interior spaces

Design Specifications

- High colour rendering with high output greater than 1500lm/m, SMD LED chips with 3M self-adhesive tape
- Roll length 5 m, cuttable every 62.5 mm at scissors symbol ✂
- Connection length can be extended by certain LED drivers, controllers and repeaters
- Dimmable with compatible controller or dimmable constant voltage LED driver; Dimming options -
Type A - trailing edge dimmer
Type B - LED Controller: LT8903DIM , LT8905DIM and LT8904DIM/RP
Type C - 1-10V analogue
- Heat sink and 24V constant voltage LED driver required; LED channel options SLT1000, SLT3000, SLT3010, SLT3020, SLT3030, SLT3040, SLT3050, SLT4050, SLT5000,

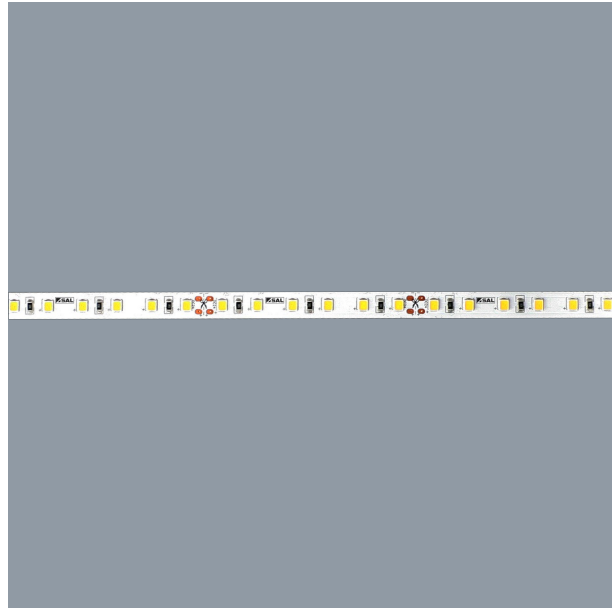

-
-
-
-
-
-
-
-

Performance

Dimmable - **OPTIONAL**
Dimmer Type - **LED controller**

Technical Specification


Model No.	Description	Input Voltage (V/DC)	Watts per metre (W/m)	Beam Angle (°)	Lumens (lm)	Body Colour
FLH2420 WW	LED STRIP H.O. 24V IP20 3K	24	20	115	1700 lm/m	CLEAR
FLH2420 CW	LED STRIP H.O. 24V IP20 4K	24	20	115	1800 lm/m	CLEAR
FLH2420 DL	LED STRIP H.O. 24V IP20 6K	24	20	115	2000 lm/m	CLEAR



Model No.	CRI	Dimensions (mm)	Colour Temperature (K)
FLH2420 WW	80	5000(L) x 8(W) x 2(H)	3000
FLH2420 CW	80	5000(L) x 8(W) x 2(H)	4000
FLH2420 DL	80	5000(L) x 8(W) x 2(H)	6000

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

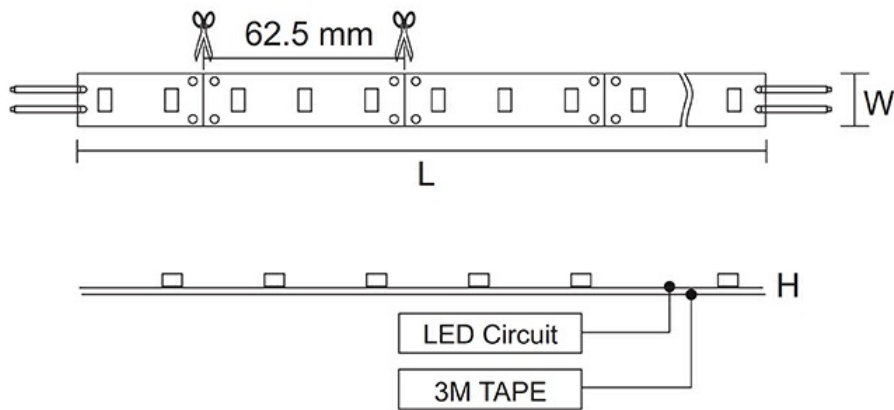



Product Images

