



FLEXI STREAMLINE 24V SINGLE COLOUR CRI90 FLLB2410/SS - 10W/m



Roll length 15m, maximum run length 15m, 10W/m, 10mm width strip, IP65, COB, CRI90

Application

Perfect for the home or commercial fit-outs.

Design Specifications

- Streamline COB LED technology, providing a smooth lighting profile, with 396 x LEDs p/metre
- Single colour white strip, choice of WW, DL or CW
- Beam distribution 140°, CRI90, 10W/m
- Cutable every 45mm
- **Dimming options:** ([quick link](#))
 Type A - Trailing edge dimming,
 Type B - LED strip controller LT8915DIM/BT with LT8914DIM/RP if required,
 Type C - Analogue 1-10V
 Type D - DALI 2 control
- **LED channel options** ([quick link](#)) Heat sink required for system performance

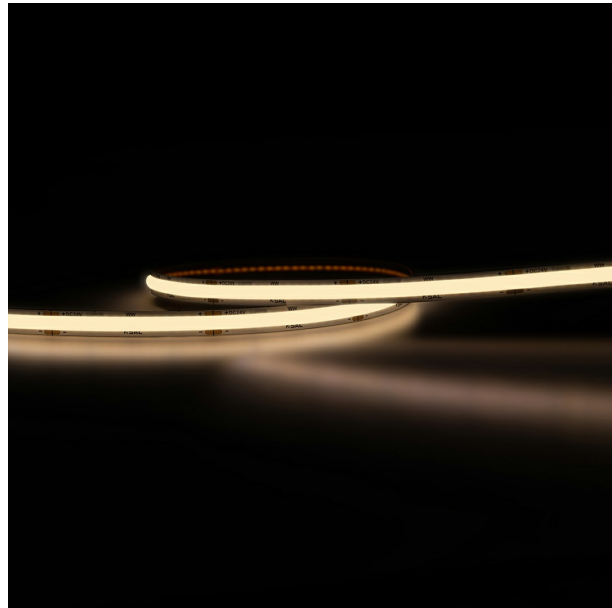




Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Refer dimming options**



Technical Specification

Product	Model No.	Input Voltage (V/DC)	Watts per metre (W/m)	Beam Angle (°)	CRI	Luminous Flux Per Meter (lm/m)
	FLLB2410/WW/SS	24	10	140	90	735
	FLLB2410/CW/SS	24	10	140	90	800
	FLLB2410/DL/SS	24	10	140	90	840

LEDs Per Metre	Cutting Interval	Colour Temp. (K)	Dim (mm)
396	45	3000	10(W) x 2(H)
396	45	4000	10(W) x 2(H)
396	45	6500	10(W) x 2(H)

NOTE: for external use, protection against direct UV exposure is recommended.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

A purple speech bubble containing the text 'DID YOU KNOW?' in white, bold, uppercase letters, followed by a large white question mark.

**DID
YOU
KNOW?**

What is the importance of EMC? Electro magnetic Compatibility, defines the use of different electronic devices (such as electrical appliances, medical equipment, LEDs and drivers etc) to operate without interference with other devices. This is a mandatory label (and testing) requirement for Australian Lighting equipment covered by AS/NZS CISPR 15. ACMA also recognise equivalent standards CISPR 15 and EN 55015. If you are unsure, ask your supplier for EMC compliance.

