



KEW SL9721 - 20/35W

IP65 LED weatherproof batten 20/35 watt selectable power

Application

Multi-purpose commercial or industrial utility applications

Design Specifications

- Rounded profile design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Stainless steel clips & screws, 20mm cable gland entry, IP65 and IK08 rated, sensor and emergency options
- Operating temperature -20 to +40 degree C
- Integral constant current non-dimmable LED driver
- Variable wattage DIP switch, 100%, 75% or 50% setting available and corridorSTANDBY options available
- Product selections compliant to AS/NZS2293
- Emergency Lighting & Exit Signs are located in the interior and exterior emergency sections of this web catalogue
- Accessories included - PVC cable glands and suspension brackets. Installation types - Surface mount (standard) or if Suspended (a suspension kit is required).
- Accessories available - Plastic clips SL9721 CLIPS



Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI, DSI**

In Built Sensor - **OPTIONAL**

Sensor Type - **MICROWAVE**

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
SL9721/20W WW	240	20	900/1800	3000	80	100
SL9721/20W DL	240	20	900/1800	5000	80	100
SL9721/20W/C	240	20	900/1800	5000	80	100
SL9721/35W WW	240	35	1800/3600	3000	80	100
SL9721/35W DL	240	35	1800/3600	5000	80	100
SL9721/35W/C	240	35	1800/3600	5000	80	100
SL9721 CLIPS						




Model No.	Body Colour	Dim (mm)	IPART	VEET
SL9721/20W WW	GREY	618(L) x 116(W) x 74(H)	YES	YES
SL9721/20W DL	GREY	618(L) x 116(W) x 74(H)	YES	YES
SL9721/20W/C	GREY	618(L) x 116(W) x 74(H)		
SL9721/35W WW	GREY	1215(L) x 116(W) x 74(H)	YES	YES
SL9721/35W DL	GREY	1215(L) x 116(W) x 74(H)	YES	YES
SL9721/35W/C	GREY	1215(L) x 116(W) x 74(H)		
SL9721 CLIPS	PLASTIC CLIPS			

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SL9721




Photometric Data

Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SL9721/20W WW at 3000K

SL9721/35W DL at 5000K

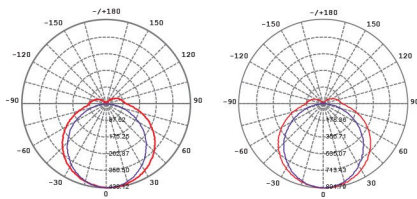

THE NEW ESS106 IS SMALL IN SIZE BUT BIG ON FEATURES.



For more
information
please
scan me

