



LEDLINE EMERGENCY SLD2000/4000 - 20/40W

Linear diffuse batten, compliant to AS/NZS 2293 emergency

Application

Wide body profile, perfect for end to end commercial installations

Design Specifications

- Pressed steel body profile, powder coat white finish
- Designed with a large terminal block for easy installation
- High efficiency LED optics, CCT 4000K
- Designed to enable end to end installation and for both maintained and non-maintained systems, Emergency classification SLD2000CW/EM D40@C0 & C63@C90, SLD4000CW/EM D40@C0 & C80@C90,
- LiFePO4 battery included (12 month warranty)
- LED charge status display and test switch, Guaranteed 90 minutes emergency function, corridorSTANDBY functions are optional for SLD4000CW/EM



Technical Specification


Product	Model No.	Input Voltage (V/AC)	CCT (K)	CRI	Dim (mm)
	SLD2000CW/EM	240	4000	80	600(L) x 100(W) x 77(H)
	SLD4000CW/EM	240	4000	80	1120(L) x 100(W) x 77(H)

Important notes: (1) Battery warranty twelve (12) months (2) In the interest of transport and safety, emergency products are supplied with the battery disconnected. (3) In addition to specific emergency commissioning instructions, the battery MUST be connected at the time of installation. (4) Continual use in emergency mode greater than 240 hours without recharge, will result in battery failure and void battery warranty.


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SLD2000

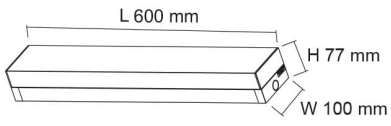

SLD4000





Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) As the first numeral stands for intrusion of a foreign object, where (P) as the second numeral stands for the penetration of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.

Need more information on IP ratings? Check out the SAL web FAQ's or speak to your local SAL team member.

**For more
information
please
scan me**

