



## LEDLINE SLD4000 - 40W

LED diffused batten 40 watt

### Application

Conventional LED linear surface mount batten for commercial service spaces

### Design Specifications

- Pressed steel body profile
- Quality white powder coat finish with an opal PMMA diffuser
- High efficiency SMD LED chips, CRI > 80, 4000K
- Integral constant current non-dimmable LED driver 40 watt, dimming and sensor options available
- Large terminal block, easy installation
- Unique diffuser design allows end to end installation, emergency options available compliant to AS/NZS 2293, Emergency classification SLD4000CW/EM D40@C0 & C80@C90, corridorSTANDBY options available



### Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**

### Technical Specification


Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
SLD4000CW	240	40	3800	4000	80	120
SLD4000CW/C	240	40	3800	4000	80	120

Model No.	Dim (mm)	Body Colour	iPART
SLD4000CW	1120(L) x 100(W) x 77(H)	WHITE	YES
SLD4000CW/C	1120(L) x 100(W) x 77(H)	WHITE	

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


## Dimensions

SLD4000

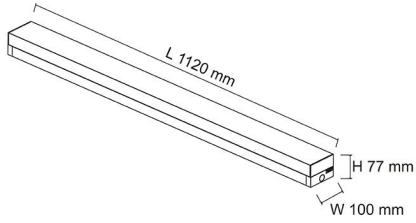

## Photometric Data

Unit: cd C0/C180 — C90/C270 —



# THE NEW ESS106 IS SMALL IN SIZE BUT BIG ON FEATURES.



For more  
information  
please  
scan me

