



MEMPHIS SQUARE SL9719SQ - 22W

Vandal resistant, LED square profile, wall or ceiling mount luminaire, IK10, IP65

Application

A robust solution for industrial and commercial spaces

Design Specifications

- Die-cast aluminium body, frosted polycarbonate diffuser, silicone gasket
 - Stainless steel allen screws
 - High efficiency LED optics
 - Integral non-dimmable LED driver
 - Designed with multi access rear or side conduit entry points
 - Optional (non-dim) corridorSTANDBY function available
- Product selections compliant to AS/NZS2293
Emergency Lighting & Exit Signs are located in the **interior** and **exterior** emergency sections of this web catalogue



-
-
-
-
-
-
-



Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing edge, 1-10V, DALI/DSI**
- In Built Sensor - **OPTIONAL**
- Sensor Type - **MICROWAVE**

Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SL9719SQ	240	22	1700	4000	80
	SL9719SQ/C	240	22	1700	4000	80

Body Colour	Dim (mm)
WHITE	316(L) x 316(W) x 102(H)
WHITE	316(L) x 316(W) x 102(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".




Dimensions

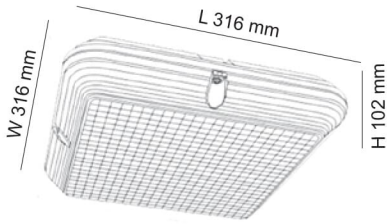

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL9719SQ at 4000K



THE NEW ESS106 IS SMALL IN SIZE BUT BIG ON FEATURES.



For more
information
please
scan me

