



MINI P60 - 12V AC-AC

Australian approved electronic transformer 12V AC-AC

Application

For use with dimmable leading or trailing edge dimmers

Design Specifications

- Overload and short circuit protection
- Overheating protection
- Safe no load operation
- Dimmable with compatible trailing edge or leading edge dimmers
- Wired complete with flex and plug
- Minimum / Max loads -
LED 1 watt min / 20 watt max,
HALOGEN 20 watt min / 60 watt max,
Note: minimum load compatibility with a dimming device, may be subject to the inclusion of a load correction capacitor/s in the circuit.
Electrical class II, Do Not Cover



-
-
-
-
-
-
-

Performance

- Dimmable - **YES**
- Dimmer Type - **TRAILING OR LEADING EDGE**

Technical Specification


Product	Model No.	Input Voltage (V/AC)	Frequency (Hz)	Output Voltage (V/AC)	Power (W)	Power Factor
	MINI/P60	240	50	11.5	60	0.99

Dimmable	Dim (mm)
YES	109(L) x 42(W) x 42(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

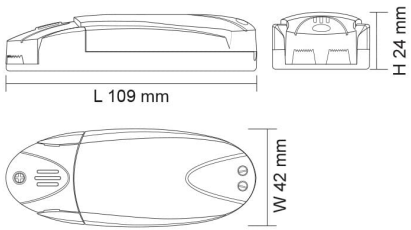

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**DIMMABLE
CONTROL WITH
SFI FLICKER
CONTROL
TECHNOLOGY**
when paired with
SAL SFI downlights



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

