



## NEWLAND SL7015LTC - 10W

LED architectural post luminaire, with selectable CCT

### Application

Ideal for residential or apartment exterior pathways

### Design Specifications

- Die-cast aluminium body, flat profile design, base plate mounting, rag bolts included
- Durable BLACK powder coated finish
- Clear polycarbonate lens, pathway optical distribution 70°
- Integral LED control gear 10 watt
- IP65, IK08 performance
- SL7015L65TC/BK - 120mm Ø, 650mm height
- SL7015L100TC/BK - 120mm Ø, 1000mm height



### Performance

- Dimmable - NO



### Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	SL7015L65TC/BK	240	10	300/340/375	3000/4000/5000	70
	SL7015L100TC/BK	240	10	300/340/375	3000/4000/5000	70

Mass (kg)	Diameter (mm)	Dim (mm)	Body Colour
2.8	120	650(H)	BLACK
3.7	120	1000(H)	BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



## Dimensions

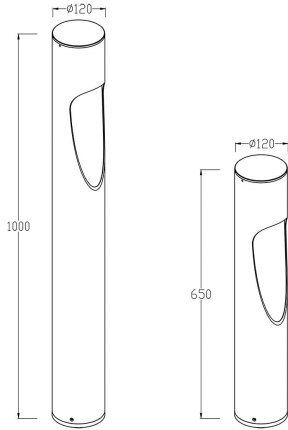



Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) As the first numeral stands for intrusion of a foreign object, where (P) as the second numeral stands for the penetration of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.

