



PANEL S9774 - 24/40W

LED panel, LOW power

Application

Designed for commercial and office space lighting tasks.


Design Specifications

- Extruded aluminium profile with high performance optical design, suitable for a range of installation types.
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI > 80
- Remote constant current non-dimmable LED driver PF>0.9, complete with flex and plug
- Choice of 4000 or 5700K , 24 or 40 watt systems
- Recessed frames, surface mount kits and suspended wire kits available

Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, (excluding S9774/612) DALI / DSI**

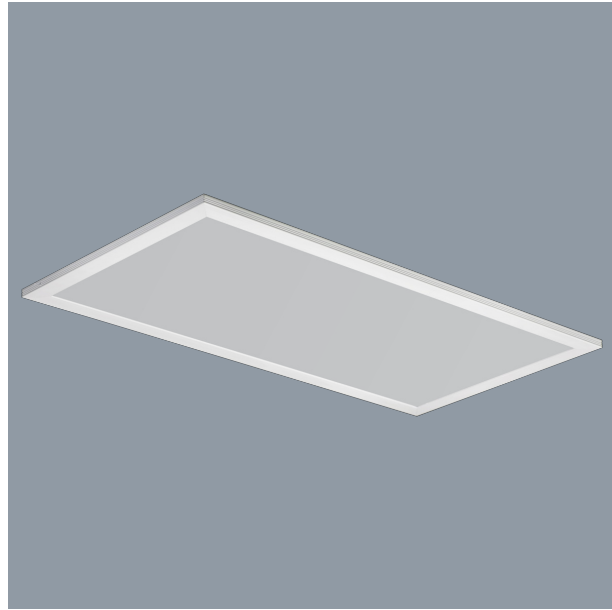

Technical Specification

| Model No. | Description | Input Voltage (V/AC) | Power (W) | Lumens (lm) | CCT (K) | CRI |
|-------------|---------------------------------------|----------------------|-----------|-------------|---------|-----|
| S9774/606CW | LED PANEL 24W 595 X 595 X 9mm CW WH | 240 | 24 | 2400 | 4000 | 80 |
| S9774/606DL | LED PANEL 24W 595 X 595 X 9mm DL WH | 240 | 24 | 2400 | 5700 | 80 |
| S9774/312CW | LED PANEL 24W 1195 X 295 X 9mm CW WH | 240 | 24 | 2400 | 4000 | 80 |
| S9774/312DL | LED PANEL 24W 1195 X 295 X 9mm DL WH | 240 | 24 | 2400 | 5700 | 80 |
| S9774/612CW | LED PANEL 40W 1195 X 595 X 11mm CW WH | 240 | 40 | 4000 | 4000 | 80 |
| S9774/612DL | LED PANEL 40W 1195 X 595 X 11mm DL WH | 240 | 40 | 4000 | 5700 | 80 |


| Model No. | Beam Angle (°) | Dimensions (mm) |
|-------------|----------------|----------------------------|
| S9774/606CW | 100 | 595(L) x 595(W) x 9(H) |
| S9774/606DL | 100 | 595(L) x 595(W) x 9(H) |
| S9774/312CW | 100 | 1195(L) x 295(W) x 9(H) |
| S9774/312DL | 100 | 1195(L) x 295(W) x 9(H) |
| S9774/612CW | 100 | 1195(L) x 595(W) x 10.5(H) |
| S9774/612DL | 100 | 1195(L) x 595(W) x 10.5(H) |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9774/606CW at 4000K

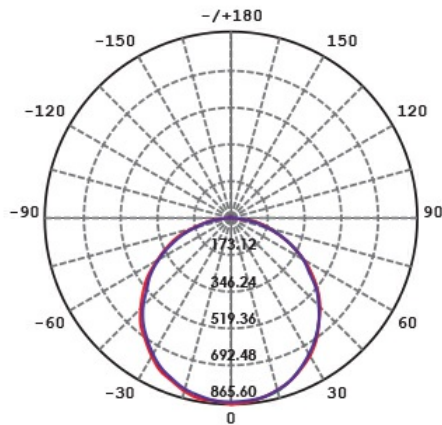

S9774/312DL at 5700K

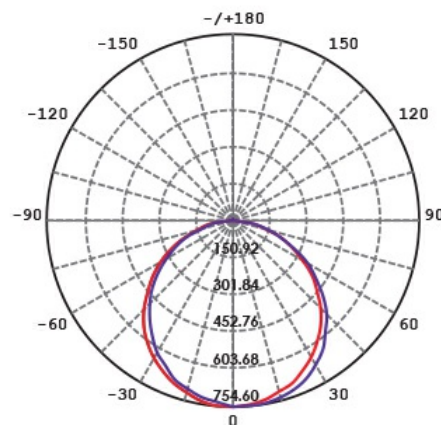

Product Images

