



PANEL S9784U TC/DP - 16/27W

LED High performance panel with selectable CCT and power

Application


Designed for commercial and office space lighting tasks.

Design Specifications

- UGR<19 performance
- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- White powder coat finish
- High efficiency LED optics, CRI >80
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Selectable CCT 3000K/4000K/5000K, Suspended wire kits available, Emergency models compliant to AS/NZS2293 with D50 spacing classification available, see Interior Emergency section.

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing edge (excluding S9784/612), 1-10V, DALI / DSI**

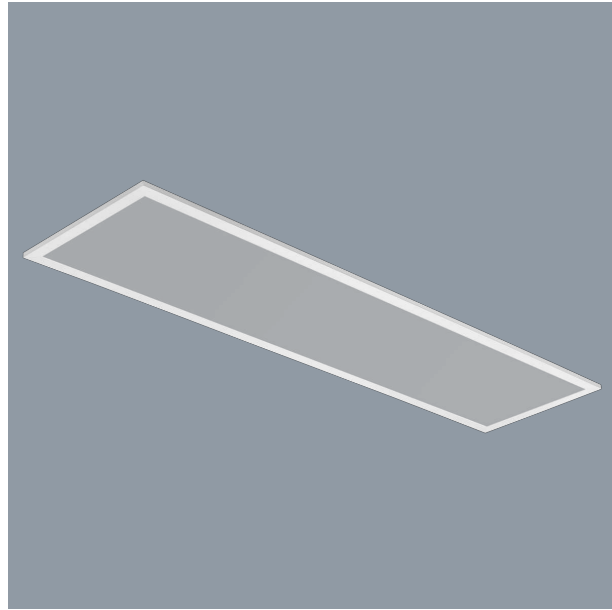

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
	S9784U606TC/DP	240	16/27	2700/2850/2750	3000/4000/5000	80
	S9784U312TC/DP	240	16/27	2700/2850/2750	3000/4000/5000	80
	S9784U612TC/DP	240	24/40	4500/4750/4600	3000/4000/5000	80

Beam Angle (°)	Dimmer Type	Body Colour	Dim (mm)	IPART	VEET
80	Trailing edge (excluding S9784/612), 1-10V, DALI / DSI	WHITE	595(L) x 595(W) x 32(H)	YES	YES
80	Trailing edge (excluding S9784/612), 1-10V, DALI / DSI	WHITE	1195(L) x 295(W) x 32(H)	YES	YES
80	Trailing edge (excluding S9784/612), 1-10V, DALI / DSI	WHITE	1195(L) x 595(W) x 32(H)		

Note (1) : Lumens (lm) shown are for FULL POWER performance.


Note (2) : For dimmable configurations, the CCT must be specified at the time of order and the DP function is deactivated.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Photometric Data

Unit: cd C0/C180 — C90/C270

S9784U312TC at 4000K



S9784U606TC at 5000K





LED downlights, oysters, linear battens and profiles, track lights, strip lights, interior architectural, highbays, lamps, emergency, floodlights, exterior architectural, weatherproof, bulkheads, sensors, electrical accessories, smart lighting controls, drivers

For more
information
please
scan me

