



## PANEL S9784U TC/DP2 - 12W/36W


LED High performance panel with selectable CCT and power

### Application

Designed for commercial and office space lighting tasks.

### Design Specifications

- UGR<19 performance
- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- White powder coat finish
- High efficiency LED optics, CRI >90
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Selectable CCT 3000K/4000K/5700K  
Suspended wire kits available
- Emergency models compliant to AS/NZS2293 with D50 spacing classification available, see Interior Emergency section.

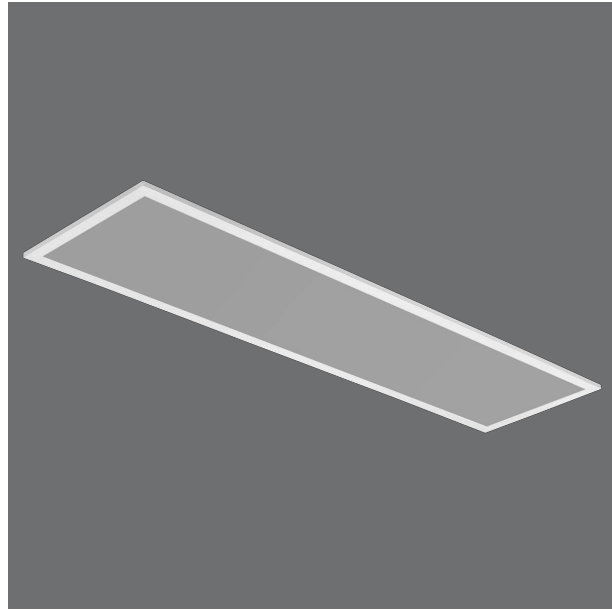

### Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **trailing edge, 1-10V, DALI/DSI**



### Technical Specification

Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
	S9784U306TC/DP2	240	12/24	2250/2500/2400	3000/4000/5700	90
	S9784U312TC/DP2	240	23/36	3400/3700/3600	3000/4000/5700	90


Beam Angle (°)	Body Colour	Dim (mm)
110	WHITE	595(L) x 295(W) x 32(H)
110	WHITE	1195(L) x 295(W) x 32(H)



Note (1) : Lumens (lm) shown are for FULL POWER performance.

Note (2) : For dimmable configurations, the CCT must be specified at the time of order and the DP function is deactivated.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

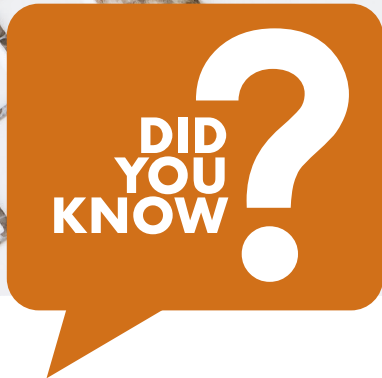

In the interest of safety and product performance, all electrical accessory components are covered by mandatory Australian and International Safety Standards. Always look out for the RCM logo on the product and if in doubt, check the compliance via your local Electrical regulator.

