



PLUTO SP24V/FC - 45W/240W

Australian approved 24V constant voltage flickerCONTROLLED power supply, IP20

Application

An ideal choice for LED strips, LED Neon or exterior lighting requirements

Design Specifications

- SELV and EMC compliant
- Safe no load operation, power factor 0.95, non-dimmable
- Overload and short circuit protection, flickerCONTROLLED performance
- Fixed wire termination
- Electrical class II, Do Not Cover.
- Choice of 45W, 100W, 150W or 240W models



Performance

- Dimmable - NO




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Frequency (Hz)	Output Voltage (V/DC)	Power (W)	Power Factor
	PLUTO45SP24V/FC	240	50	24	45	0.95
	PLUTO100SP24V/FC	240	50	24	100	0.95
	PLUTO150SP24V/FC	240	50	24	150	0.95
	PLUTO240SP24V/FC	240	50	24	240	0.95



Dimmable	Dim (mm)
NO	251(L) x 31(W) x 19(H)
NO	316(L) x 31(W) x 23(H)
NO	336(L) x 31(W) x 23(H)
NO	361(L) x 31(W) x 23(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

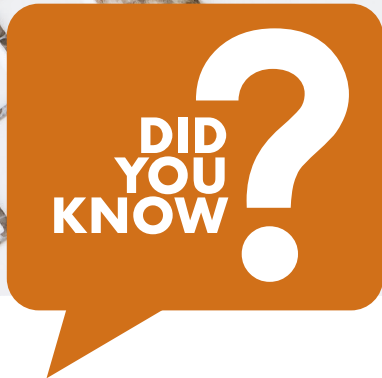

In the interest of safety and product performance, all electrical accessory components are covered by mandatory Australian and International Safety Standards. Always look out for the RCM logo on the product and if in doubt, check the compliance via your local Electrical regulator.

