



PREMIER S9073TC / DP - 13/18W

Dimmable IP64 , 18W LED downlight with selectable colour temperature and power

Application


Ideal for any commercial interior space looking for an economical lighting choice

Design Specifications

- Premium aluminium body profile, CA90 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current trailing edge dimmable LED driver, with flex and plug

Performance

Dimmable - **YES**
Dimmer Type - **Trailing edge, optional 1-10V, DALI, DSI**

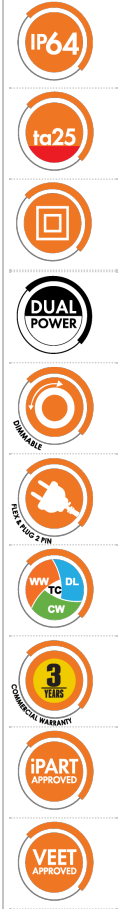

Technical Specification

Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	Beam Angle (°)	Dimmable
S9073TC/SL/DP	240	13/18	1400/1550/1550	3000/4000/5700	90	YES
S9073TC/WH/DP	240	13/18	1500/1800/1600	3000/4000/5700	90	YES


Model No.	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)	iPART	VEET
S9073TC/SL/DP	80	SILVER	135	165	165(W) x 63(H)		
S9073TC/WH/DP	80	WHITE	135	165	63(H)	YES	YES

Note: Lumens (lm) shown are displayed at FULL power

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions


S9073TC

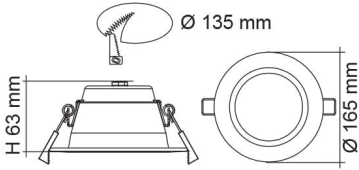

Photometric Data

Photometric Data

Unit: cd C0/C180 — C90/C270



THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

