



RENMARK S9082D - 14/20W TC/DP

IP44, 14/20W LED downlight with selectable CCT and power

Application

Ideal for any retail, residential or commercial interior space

Design Specifications

- Premium aluminium body profile, IC-4 rated
- Stylish white body profile and WH trim with optional WH square, BK round or BK square quick connect plastic trims to order
- High performance optical diffuser, beam 80°
- High efficiency LED optics
- Remote constant current selectable power, flickerCONTROLLED LED driver, with flex and plug
- Selectable CCT 3000, 4000, 5700K







Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing Edge**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9082D20TC/DP	240	14/20	2100/2400/2300	3000/4000/5700	80
	S9082SQ/WH/P					
	S9082RD/BK/P					
	S9082SQ/BK/P					

Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)	IPART
OPTIONAL	80	WHITE	145	174	87(H)	N/A
		WHITE	145		174(L) x 174(W)	N/A
		BLACK	145	174		N/A
		BLACK	145		174(L) x 174(W)	N/A



REES	VEET
N/A	N/A
N/A	N/A
N/A	N/A
N/A	N/A

NOTE: lumens (lm) displayed are at MAXIMUM power

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

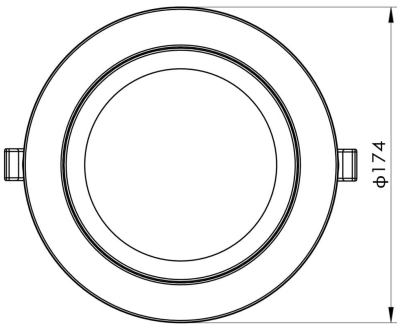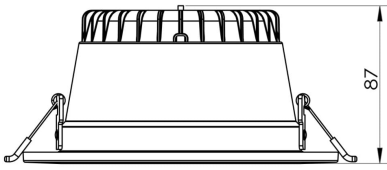

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

