



rippleSHIELD DIMMER - SDD400SFI

PIXIE MASTER DEVICE - Dimmable control with rippleSHIELD technology, when paired with SAL rippleSHIELD downlights

Application


Ideal for any residential or commercial interior spaces where nuisance ripple induced flicker is visible

Design Specifications

- Digital push button control, with three (3) complimentary key caps provided to suit most switch plates
- Combined with the SAL rippleSHIELD downlights Ecogem or Unifit series, the rippleSHIELD dimmer eliminates nuisance ripple induced flicker between 750-1050Hz once and for all.
- Smooth dimming performance to 1.0% of light output
- PIXIE connectivity is achieved via the PIXIE / PIXIE PLUS app or paired secondary device.
- Refer installation instructions for load compatibility chart.
- Need more info.....slide to the FAQ's below

Performance

- Dimmable - YES
- Dimmer Type - SFI Trailing edge SDD400SFI ONLY

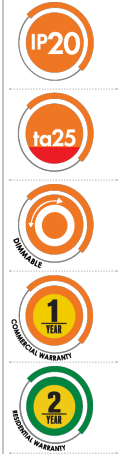

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Body Colour	Dim (mm)
	SDD400SFI	240	250	WHITE CAP	42(L) x 24(W) x 24(H)


Patent pending

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Wiring Diagram

SDD400SFI - Standard wiring diagram



THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

