



## S-FIRE SELK1500ISF - 1.6W

**NON-MAINTAINED** - SELK1500ISF S-FIRE LED emergency luminaire, complete with adapter ring

### Application

A perfect choice for apartments or commercial spaces

### Design Specifications

- Compliant to AS/NZS 2293, emergency spacing classification D32, non-maintained
- Polycarbonate body profile, IP20, double insulation, Ø92 mm cut-out, adaptor plate suits cutout Ø110 mm - Ø150 mm, outside plate Ø170 mm
- LED charge status display and test switch
- 1.2 m flex & 3 pin plug fitted for easy plug and play installation, IC-4 rated
- Integral converter and replaceable battery pack LiFePO4 3.2V 1.5Ah (SELK1500ISF BATTERY)
- Guaranteed 90 minutes emergency function, intelligent automatic recharging function, 16 hour recharge time and deep discharge protection



### Performance

- Dimmable - **NO**



### Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	CCT (K)	Body Colour	Diameter (mm)
	SELK1500ISF	240	1.6	4000	WHITE	103

#### Dim (mm)


46(H)

#### Replacement battery - (SELK1500ISF/BAT)

**Important notes:** (1) Battery warranty twelve (12) months (2) In the interest of transport and safety, emergency products are supplied with the battery disconnected. (3) In addition to specific emergency commissioning instructions, the battery **MUST** be connected at the time of installation. (4) Continual use in emergency mode greater than 240 hours without recharge, will result in battery failure and void battery warranty.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

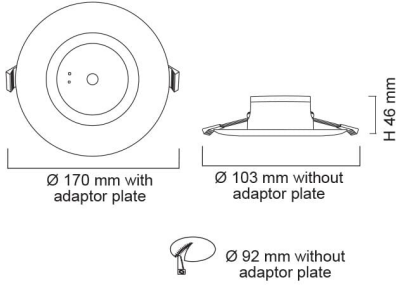



Blackwattle Bay NSW

Images courtesy of MKGS Construction & Paton Power

**The difference between Non-maintained and Maintained Emergency Lighting?** Non-Maintained lighting products are luminaires designed solely for emergency use and will only operate in an event where the mains supply power is interrupted. Maintained Emergency Lighting products are designed to be illuminated at all times, including an emergency event where the power is interrupted. Under both systems, the products must remain illuminated for a period of 90 minutes in accordance with AS/NZS2293 Emergency Lighting requirements.

