





SHELL SO3160 - 14/30W

IP20 LED Oyster

Application

A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Premier aluminium housing, two profile sizes available
- Chrome plated centre locking disc
- Opal acrylic diffuser
- High efficiency SMD LED chips, CRI >80
- Integral constant current non-dimmable LED driver
















Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
SO3160/30	240	14	930	3000	80	90
SO3160/45	240	30	1800	3000	80	90

Model No.	Body Colour	Diameter (mm)	Dim (mm)
SO3160/30	Anodised silver	290	63(H)
SO3160/45	Anodised silver	450	90(H)


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions





PIXIE AMBIENCE, CHANGE YOUR STYLE.

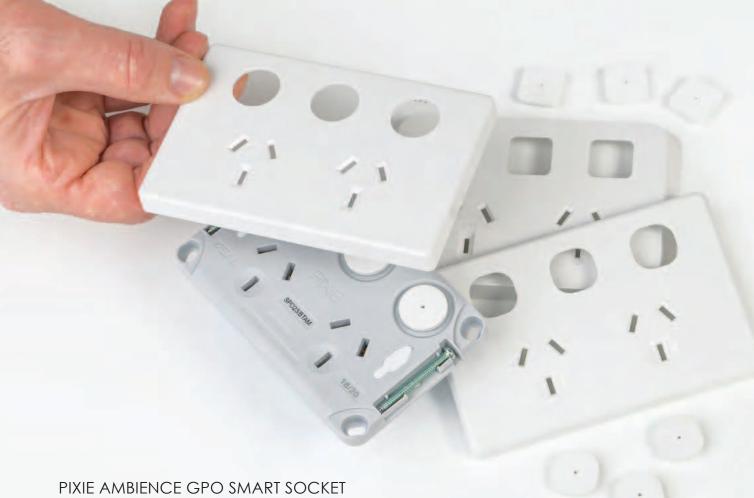

SPO23/BTAM



For more information please scan me



NSW/ACT: 02 9723 3099 QLD: 07 3879 5999 VIC/TAS/SA/NT: 03 9532 3168 WA: 08 9248 7458

© Copyright SAL - All Rights Reserved