



SLIMLINE SEAMLESS TC LINKABLE SL9706 - 4/22W

TC SEAMLESS SLIMLINE

Application

Great for commercial shop spaces, home pantries, walk-in wardrobes

Design Specifications

- Selectable colour temperature 3000K, 4000K, 5000K, beam distribution 105 degree, CRI > 80
- Polycarbonate body profile and opal diffuser
- Integral constant current non-dimmable driver
- Individual switch control, plug and play flex and plug included
- Maximum connections: 280TC 55, 540TC 25, 840TC 17, 1140TC 12, 1440TC 10 UNITS
- Accessories: SL9706/32CM LINK (L 320mm)
SL9706/76CM LINK (L 760 mm)



Technical Specification



Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SL9706/280TC	LED LINKABLE 4W 280mm TC	240	4	300/380/300	3000/4000/5000	80
SL9706/540TC	LED LINKABLE 9W 540mm TC	240	9	750/800/750	3000/4000/5000	80
SL9706/840TC	LED LINKABLE 13W 840mm TC	240	13	1050/1200/1050	3000/4000/5000	80
SL9706/1140TC	LED LINKABLE 18W 1140mm TC	240	18	1550/1600/1600	3000/4000/5000	80
SL9706/1440TC	LED LINKABLE 22W 1440mmTC	240	22	1800/2000/1800	3000/4000/5000	80

Model No.	Beam Angle (°)	Dimensions (mm)	Body Colour
SL9706/280TC	105	280(L) x 23(W) x 36(H)	WHITE
SL9706/540TC	105	540(L) x 23(W) x 36(H)	WHITE
SL9706/840TC	105	840(L) x 23(W) x 36(H)	WHITE
SL9706/1140TC	105	1140(L) x 23(W) x 36(H)	WHITE
SL9706/1440TC	105	1440(L) x 23(W) x 36(H)	WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

L 280 mm

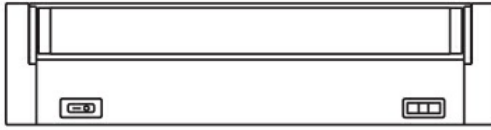

H 36 mm

W 23 mm



SL9706/280

SL9706/540

SL9706/840


SL9706/1140

SL9706/1440

TC SELECTABLE



Dimensions

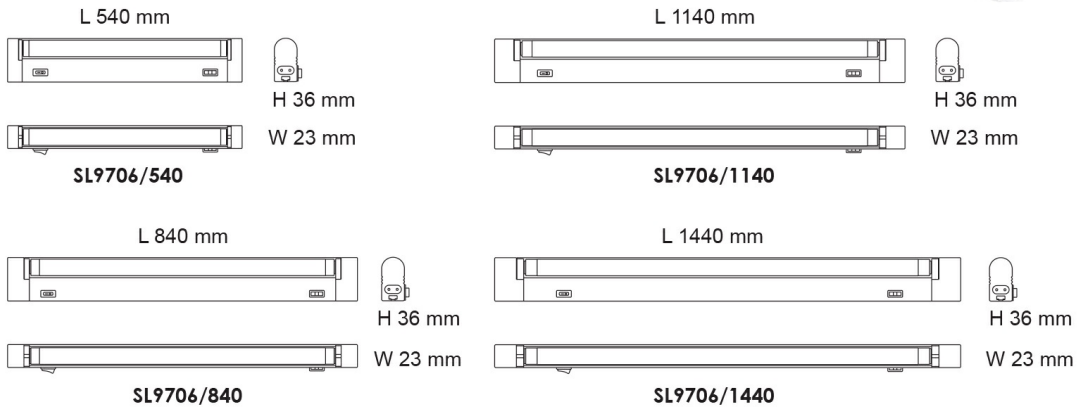

Maximum connections

Mixed connections maximum 240W

Model	1	2	3	4...	Total
SL9706/280TC	□	□	□	□	55pcs
SL9706/540TC	□	□	□	□	25pcs
SL9706/840TC	□	□	□	□	17pcs
SL9706/1140TC	□	□	□	□	12pcs
SL9706/1440TC	□	□	□	□	10pcs