



SOL SL9726TC / DP -10/50W


IP65 LED DUAL POWER weatherproof batten with selectable colour temperature and power with sensor options

Application

Commercial or industrial utility applications requiring IP65 and IK08 performance

Design Specifications

- Colour temperature selectable by DIP switch, 3000K /4000K /6000K
- Rounded profile design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Stainless steel clips & screws, 20mm cable gland entry
- Integral constant current non-dimmable, DUAL POWER LED driver, 10/20, 20/42 or 30/50 watt models. StandBy options have fixed driver power.
- Product selections compliant to AS/NZS2293
Emergency Lighting & Exit Signs are located in the interior and exterior emergency sections of this web catalogue
- Accessories included - PVC cable glands and suspension brackets. Installation types - Surface mount (standard) or if Suspended (a suspension kit is required), corridorSTANDBY options available

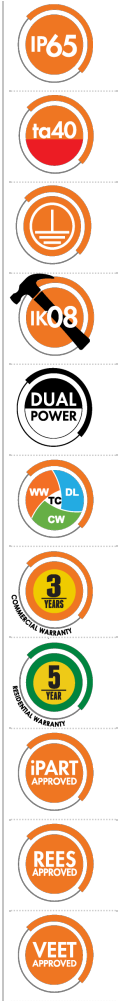

Performance

Dimmable - **OPTIONAL**
Dimmer Type - **Trailing edge, 1-10V, DALI, DSI**
In Built Sensor - **OPTIONAL**
Sensor Type - **MICROWAVE**

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
SL9726/20TC/DP	240	20	10/20	2040/2300/2200	3000/4000/6000	80
SL9726/40TC/DP	240	42	20/42	4370/4990/4720	3000/4000/6000	80
SL9726/20TC/C	240	20		1800	3000/4000/6000	80
SL9726/40TC/C	240	40		3700	3000/4000/6000	80
SL9726/40TC/S	240	42	20/42	4370/4990/4720	3000/4000/6000	80
SL9726/50TC/DP	240	50	30/50	5480/6070/5920	3000/4000/6000	80



Model No.	Beam Angle (°)	Body Colour	Dim (mm)	IPART	VEET	REES
SL9726/20TC/DP	120	GREY	642(L) x 118(W) x 77(H)	YES	YES	YES
SL9726/40TC/DP	120	GREY	1251(L) x 118(W) x 77(H)	YES	YES	YES
SL9726/20TC/C	120	GREY	642(L) x 118(W) x 77(H)			
SL9726/40TC/C	120	GREY	1251(L) x 118(W) x 77(H)			
SL9726/40TC/S	120	GREY	1251(L) x 118(W) x 77(H)			
SL9726/50TC/DP	120	GREY	1551(L) x 118(W) x 77(H)			

Note: Lumens (lm) shown are displayed at FULL power


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

(642 x 118 x 77mm), (1251 x 118 x 77mm)

Integrated microwave motion sensor with standBy function

Model No.	Power (W)	Detection Range	Daylight Threshold	Duration (mins)	Standby Level	Standby Period
SL9724/20TC/C	20	100%	Disabled	5	30%	24 hrs.
SL9724/40TC/C	40	100%	Disabled	5	30%	24 hrs.

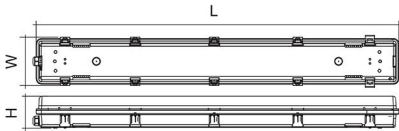



Photometric Data

Photometric Data

Unit: cd C0/C180 — C30/C210 —
cd C60/C240 — C90/C270 —

SL9726/20TC/DP at 3000K

SL9726/40TC/DP at 4000K



THE NEW ESS106 IS SMALL IN SIZE BUT BIG ON FEATURES.



For more
information
please
scan me

