



## STARLIGHT SPK1000TC - 12W


12 watt IP65 LED floodlight, with TC selectable lamp

### Application

An economical security solution for residential exterior spaces

### Design Specifications

- Independently adjustable heads
- UV stabilized plastic body
- E27 lamp base
- PAR38 LED lamp included, beam distribution 100 degree, TC selectable lamp 3000/4000/6000K
- IP65, electrical class II

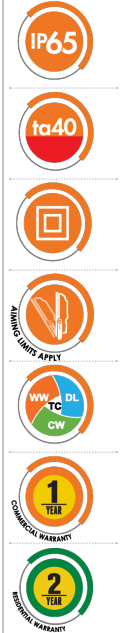

**TC SELECTABLE COLOUR**

WARM WHITE <b>3000K</b>	COOL WHITE <b>4000K</b>	DAYLIGHT <b>6000K</b>
----------------------------	----------------------------	--------------------------

### Technical Specification


Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CRI	Beam Angle (°)	Body Colour
SPK1000TC/BK	240	12	1500/1700/1500	80	100	BLACK

Model No.	Dim (mm)	Mass (kg)
SPK1000TC/BK	213(L) x 112(W)	0.75

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

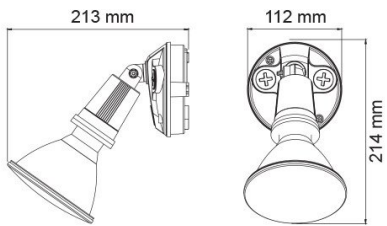

## POWERSTAR SE7100/600 - 600W



Before selecting a floodlight look out for the marks of Compliance and Safety. Starting with the RCM mark, this signals that the product has been tested to all relevant Australian Safety standards, to ensure the product delivers its designed safety performance.

In addition look out for limits in aiming orientation to ensure the floodlight operates within its design limits and to ensure the product is suitable for such an application.

*Need more information on AS/NZS 60598 safety and compliance?  
Check out the SAL web FAQ's or speak to your local SAL team member.*

For related  
products  
please  
scan me

