



TUBELINE DIFFUSE STD - 9/36W

Conventional LED tube diffuse battens 9 - 36 watt

Application

Conventional LED interior battens ideal for residential and commercial service spaces

Design Specifications

- Pressed steel base with PVC body
- Large terminal block, easy installation
- Quality white powder coat finish
- High efficiency LED T8 tubes fitted, beam distribution 120 degree, CRI >80, 3000K, 4000K, 6000K
- Safety HRC fuse installed
- Optional models - wire guard (STG series) and emergency models with LiFePO4 battery technology compliant to AS/NZS2293 are available. Battery warranty twelve (12) months



Performance

- Dimmable - **NO**

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Lumens (lm)	CCT (K)	Power (W)	Dimmable
	STD/106 WW	240	650	3000	9	NO
	STD/106 CW	240	700	4000	9	NO
	STD/106 DL	240	750	6000	9	NO
	STD/112 WW	240	1300	3000	18	NO




Product	Model No.	Input Voltage (V/AC)	Lumens (lm)	CCT (K)	Power (W)	Dimmable
	STD/112 DL	240	1700	6000	18	NO
	STD/206 WW	240	1400	3000	18	NO
	STD/206 CW	240	1400	4000	18	NO
	STD/206 DL	240	1500	6000	18	NO
	STD/212 WW	240	2600	3000	36	NO
	STD/212 CW	240	2800	4000	36	NO
	STD/212 DL	240	3000	6000	36	NO
	STD/206EM2500	240	n/a	4000	18	NO
	STD/212EM2500	240	n/a	4000	36	NO

CRI	Beam Angle (°)	Body Colour	Dim (mm)	IPART	REES
80	120	WHITE	625(L) x 65(W) x 77(H)		
80	120	WHITE	625(L) x 55(W) x 77(H)	YES	YES
80	120	WHITE	625(L) x 55(W) x 77(H)	YES	YES
80	120	WHITE	1225(L) x 55(W) x 77(H)		
80	120	WHITE	1225(L) x 55(W) x 77(H)	YES	YES
80	120	WHITE	1225(L) x 55(W) x 77(H)	YES	YES
80	120	WHITE	625(L) x 110(W) x 77(H)		
80	120	WHITE	625(L) x 110(W) x 77(H)	YES	YES
80	120	WHITE	625(L) x 110(W) x 77(H)	YES	YES
80	120	WHITE	1225(L) x 110(W) x 77(H)		
80	120	WHITE	1225(L) x 110(W) x 77(H)	YES	YES
80	120	WHITE	1225(L) x 110(W) x 77(H)	YES	YES
80	120	WHITE	625(L) x 110(W) x 77(H)		
80	120	WHITE	1225(L) x 110(W) x 77(H)		

Note: D50 emergency classification

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

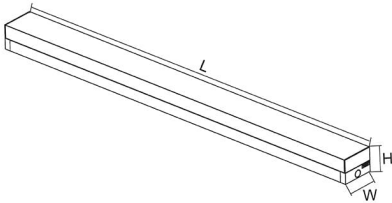



Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) As the first numeral stands for intrusion of a foreign object, where (P) as the second numeral stands for the penetration of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.

Need more information on IP ratings? Check out the SAL web FAQ's or speak to your local SAL team member.

**For more
information
please
scan me**

