



UNITREK STR39017 - 15W

15 watt architectural track spot - Unitrek three circuit

Application

Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical profile, 350 degree rotation
- Aluminium body profile, colour matt white or black
- High efficiency COB LED chip, CRI > 80, CCT 3000 or 5000K
- Changeable multifaceted system, standard beam distribution 40, optional 25 and 60 degree
- 15 watt integral non - dimmable driver



- THREE CIRCUIT
- IP20
- ra25
- 2 YEARS COMMERCIAL WARRANTY
- 3 YEARS RESIDENTIAL WARRANTY
- WARM WHITE 3000K
- DAYLIGHT 5000K


Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Body Colour
STR3/9017/15W/WW/WH	LED TRACK SPOT 15W 3K WHITE	240	15	1200	3000	WHITE
STR3/9017/15W/WW/BK	LED TRACK SPOT 15W 3K BLACK	240	15	1200	3000	BLACK
STR3/9017/15W/NDL/WH	LED TRACK SPOT 15W 5K WHITE	240	15	1300	5000	WHITE
STR3/9017/15W/NDL/BK	LED TRACK SPOT 15W 5K BLACK	240	15	1300	5000	BLACK

Model No.	CRI	Beam Angle (°)	Dimensions (mm)
STR3/9017/15W/WW/WH	80	40	65(W) x 175(H)
STR3/9017/15W/WW/BK	80	40	65(W) x 175(H)
STR3/9017/15W/NDL/WH	80	40	65(W) x 175(H)
STR3/9017/15W/NDL/BK	80	40	65(W) x 175(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

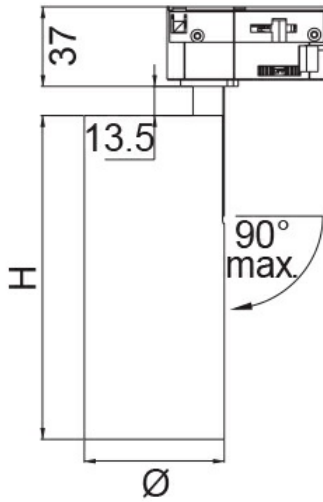

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

STR3/9017/15W/WW at 3000K

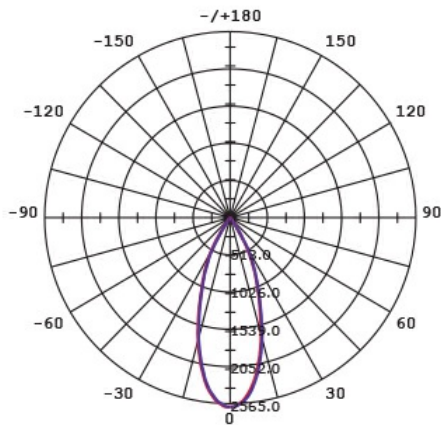

Product Images

