



WIDELINE S9733L - 20/65W

LED wide diffused batten 20-65 watt with selectable colour temperature

Application

Low profile design suitable for residential apartments and commercial service spaces

Design Specifications

- Wide pressed steel base with opal polycarbonate diffuser
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI>80, beam distribution 120 degree
- Integral-in constant current non-dimmable LED driver
- Easy selectable colour temperature with an inbuilt DIP switch, CCT 3000K,4000K,5700K
- Large terminal block, easy installation




Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
S9733L/206TC	LED DIFFUSED BAT 595mm 3/4/6K	240	20	1800	3000/4000/5700	80
S9733L/212TC	LED DIFFUSED BAT 1144mm 3/4/6K	240	38	3700	3000/4000/5700	80
S9733L/215TC	LED DIFFUSED BAT 1500mm 3/4/6K	240	65	5400	3000/4000/5700	80

Model No.	Beam Angle (°)	Dimensions (mm)	Body Colour
S9733L/206TC	120	610(L) x 160(W) x 60(H)	WHITE
S9733L/212TC	120	1144(L) x 160(W) x 60(H)	WHITE
S9733L/215TC	120	1495(L) x 160(W) x 60(H)	WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

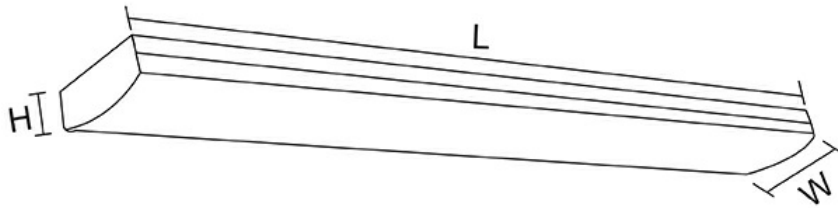




Photometric Data

Unit: cd C0/C180 — C30/C210 —
 cd C60/C240 — C90/C270 —

S9733L/206TC at 3000K

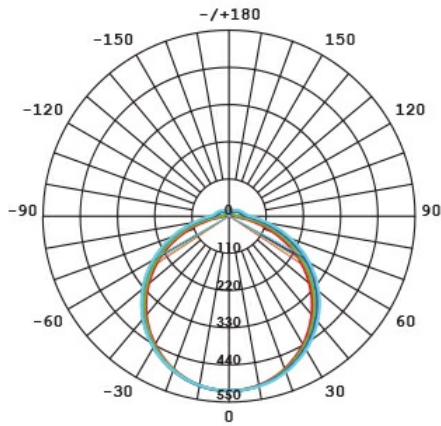

S9733L/212TC at 5700K

