Single Motor Low Voltage Control (LVC)

SPECIFICATION DATA


SUGGESTED SPECIFICATIONS: Electrical rating 115 VAC 60 Hz 5A. The single motor LVC is used to operate Da-Lite single motor electric screens from one or more locations, remote control, or for integration into a control panel system. Operated by a 3-button momentary, dry contact switch. Any combination of single or multiple 3-button switches, optional sceen controller accessory or a control panel with momentary dry contacts may control the LVC. Control board to be mounted in a galvanized steel housing measuring 2 1/4" H x 4 1/2" W x 10 1/2" L. Standard knockouts provided on housing for 1/2" conduit connections. Control to be listed by Underwriter's Laboratories.



WIRING

NOTE: Do not seal in - allow access.

NOTE: Recommended Wire Size: 14-18 AWG

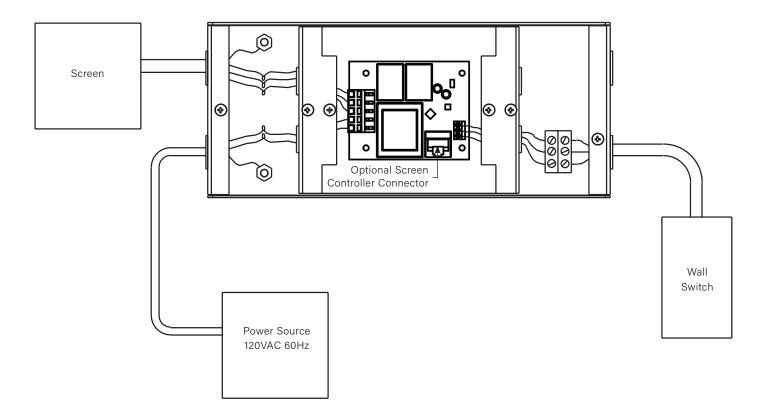

1



PRODUCT NOTES

• Specifications are subject to change without notice.

WHEN ORDERING, MARK APPROPRIATE SELECTIONS:

| | • | |
|------|--|--|
| 1. 5 | Select optional accessories: | |
| | Screen Controller (IP Control, RS-232, Dry Contact, Trigger) | |
| | ☐ PoE Injector | |
| | ☐ BLE Remote | |
| | ☐ Infrared Remote | |
| | Additional 3-button Wall Switch. | |
| | 230V/50Hz Model Available. | |
| | Key Locking Cover Plate for 120V or Low Voltage Control (LVC). | |
| | | |

| DA-LIT | E. |
|-----------------------------|----|
| A brand of D legrand | |

| Project Name: | |
|---------------|--------|
| Architect: | |
| Contractor: | Phone: |
| Reseller: | Phone: |
| | |

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

FOR YOUR IMAGE | legrandav.com

USA 866.977.3901 av.da-lite.support@legrand.com CANADA 877.345.4329 av.da-lite.support@legrand.com EMEA +31 495 580 840 av.emea.sales@legrand.com APAC +852 2145 4099 av.asia.sales@legrand.com