



U-LED™ FILAMENT LED S14

Filament LED S14 for Accent Lighting, Marquees, and Signs

Ushio America brings modern technology to classic design with its U-LED™ Filament LED S14 filament lamps. These lamps provide the timeless look of an incandescent lamp with the energy efficiency of LED technology. U-LED filament LED lamps have no visible circuit boards or heat sinks, they are dimmable and provide an omnidirectional light that replicates the appearance of incandescent filament lamps.

Unlike traditional incandescent, the U-LED S14 lamps operate cool to the touch while saving up to 90% in energy costs. These LED lamps provide 150 lumens and consume only 1.5W of power. U-LED S14 lamps are rated for 25,000 hours and approved for wet location operation.

Ushio America is proud to stand behind these energy-saving lamps with a 3-year limited warranty. The U-LED S14 lamps are available in E26 medium base with soft white color temperature (2700K).




FEATURES & BENEFITS

- Up to 90% Energy Saving
- Dimmable
- Wet Location Rated for Indoor or Outdoor Use
- Direct Replacement for 11W S14 Lamps
- 25,000 Hours Rated Life
- Application Friendly: UV Free & IR Free
- Environmentally Friendly: Mercury Free, Lead Free and RoHS Compliant
- 3-Year Limited Warranty

APPLICATIONS

- Accent Lighting
- Marquees
- Signs
- Indoor and Outdoor

SPECIFICATIONS

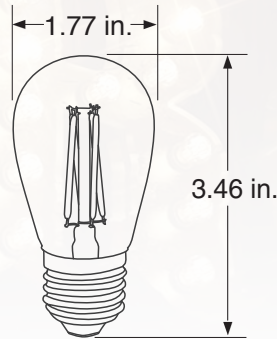


**S14
E26 Base**

Case Quantity: 16

Watts (W)	Ordering Code	Lamp Description	Bulb Type	Bulb Finish	Volts (V)	Color Temp (K)	Burn Position	Lumens (lm)	CRI	Avg** Life (h)
1.5	1004161	U-LED S14, Clear, SW27	S14	Clear	120	2700	Any	150	80	25,000

**Item 1004161
1.5W LED S14, CLEAR, WW27**

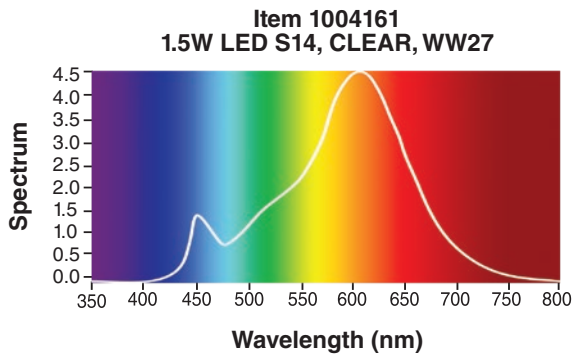

Lighting Facts/ Facts d'éclairage

Per Bulb/Par l'ampoule

Brightness/Luminosité 150 lumens

Estimated Yearly Energy Cost/ Coût énergétique annuel estimé \$0.18

Based on 3 hrs/day, 11¢/kWh. Cost depends on rates and use. /Basé sur 3 heures/jour, 11¢/kWh. Les coûts dépendent du tarif et de la fréquence d'utilisation.

Life/Vie 22.8 years/ans
Based on 3 hrs/day. /Basé sur 3 heures/jour.

Light Appearance/Apparence de l'éclairage

Warm/Chaud Cool/Froid
2700K

Energy Used/Énergie utilisée 1.5 watts

⚠ CALIFORNIA PROPOSITION 65 WARNING: These products can expose you to chemicals including nickel, which are known to the State of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

CAUTION:

This lamp may not be compatible with all dimmers. Check www.ushio.com to find up to date dimmer compatibility options. Use only 120V 60Hz circuits. Do not open. No user serviceable parts inside. This device is not intended for use with emergency exit fixtures, emergency exit lights, photo controls or electric timers. This lamp must be used in an approved wet-location socket. Fully enclosed or recessed fixtures must contain proper ventilation. Reliable operating temperature is -4°F to 80°F. Risk of electric shock. Do not use if outer lamp envelope is damaged or broken. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

