


WARNING-RISK OF FIRE MOST DWELLINGS BUILT BEFORE 1985 HAVE SUPPLY WIRE RATED
60V. CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING.

INSTALLATION INSTRUCTIONS AND TEMPLATE FOR 6" REMODEL HOUSING

1. USING TEMPLATE, SCRIBE CIRCLE ON CEILING IN DESIRED LOCATION.
2. **ACCURATELY CUT HOLE IN CEILING.**
3. PROVIDE ELECTRICAL SERVICE WITH FLEXIBLE CABLE ONLY.
PASS CABLE THROUGH OPENING AND WIRE FIXTURE IN ACCORDANCE
4. WITH NEC OR YOUR LOCAL ELECTRICAL CODE.
WITH CLIPS SEATED PROPERLY IN CAN (FIG. 1),
INSERT REMODEL HOUSING INTO CEILING, JUNCTION BOX FIRST,
5. HOLD FIXTURE UP AGAINST CEILING AND PUSH CLIP THROUGH HOUSING
SLOT (FIG. 2)
6. TO LOCK CLIP IN PLACE PUSH FLAT PORTION AGAINST SIDE OF CAN (FIG. 2).
7. TO RELEASE PULL DOWN ON CLIP (FIG. 3).
8. INSTALL TRIM.

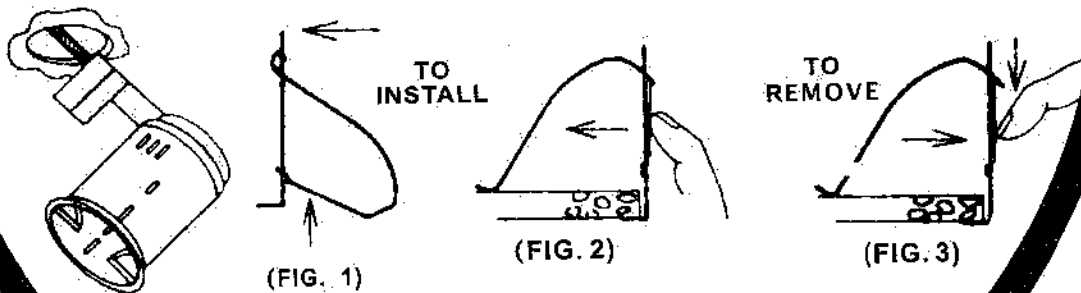

NOTE: IN AREAS WHERE EXCESSIVE CEILING VIBRATION CAN OCCUR,
WE SUGGEST YOU USE A #1/4-14 x 1/2" PAN HD SHEET METAL
SCREW TO FURTHER LOCK THE SPRING CLIPS AGAINST THE
FIXTURE HOUSING. DRIVE THE SCREW THROUGH THE
HOLE IN THE SPRING CLIP AND INTO THE
HOUSING SLOT.