



MASTERColour CDM-TC

MASTERColour CDM-TC 35W/842 G8.5 1CT/12

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Product data

• General Information

Cap-Base	G8.5 [G8.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life To 5% Failures (Nom)	6000 h
Life To 10% Failures (Nom)	8000 h
Life To 20% Failures (Nom)	9000 h
Life To 50% Failures (Nom)	12000 h
Ansi Code HID	-

• Light Technical

Color Code	842 [CCT of 4200K]
Luminous Flux (Nom)	3100 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	70 %
Lumen Maintenance 2000 h (Min)	75 %
Lumen Maintenance 2000 h (Nom)	85 %
Lumen Maintenance 5000 h (Min)	70 %
Lumen Maintenance 5000 h (Nom)	80 %
Chromaticity Coordinate X (Nom)	0.374
Chromaticity Coordinate Y (Nom)	0.369
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (rated) (Nom)	79 lm/W

Color Rendering Index (Nom)	85
-----------------------------	----

• Operating and Electrical

Power (Rated) (Nom)	39.0 W
Ignition Supply Voltage (Max)	198 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	93 V
Voltage (Min)	77 V
Voltage (Nom)	85 V

• Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

• Mechanical and Housing

Bulb Finish	Clear (CL)
Bulb Material	UV-Block Quartz

• Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	2.7 mg

PHILIPS

MASTERColour CDM-TC

• UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.5

• Luminaire Design Requirements

Bulb Temperature (Max)	500 °C
Pinch Temperature (Max)	300 °C

• Product Data


Full product code	871150020957315
-------------------	-----------------

Order product name	MASTERColour CDM-TC 35W/842 G8.5 1CT/12
EAN/UPC - Product	8711500209573
Order code	928093805125
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928093805125
Net Weight (Piece)	10.000 g
ILCOS Code	MT/UB-35/842-H-G8.5-17/85

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

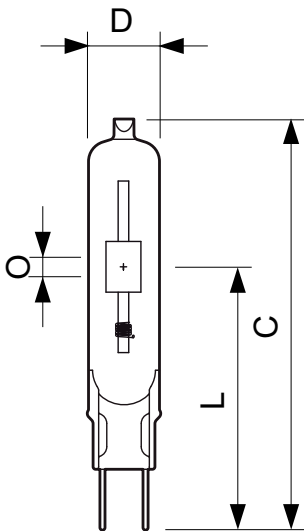


CDM-TC 35W /830, /842

CDM-TC 35W/842 G8.5


Product	D	D	O	L	L	L	C
MASTERColour CDM-TC 35W/842 G8.5 1CT/12	15 mm	0.5 in	5 mm	51 mm	53 mm	52 mm	85 mm

MASTERColour CDM-TC

Dimensional drawing



Photometric data

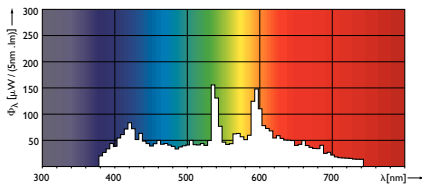

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change