



MSR Hot Restrike

MSR 125 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data

General Information		Ignition Supply Voltage (Min)	
Cap-Base	GZX9.5 [GZX9.5]	207 V	
Operating Position	UNIVERSAL [Any or Universal (U)]	Controls and Dimming	
Main Application	Studio/Theatre	Dimmable	Yes
Life To 50% Failures (Nom)	200 h	Mechanical and Housing	
System Description	Hot Restrike	Cap-Base Information	-
Light Technical		Luminaire Design Requirements	
Color Code	- [Not Specified]	Bulb Temperature (Max)	700 °C
Luminous Flux (Min)	8000 lm	Pinch Temperature (Max)	350 °C
Luminous Flux (Nom)	9400 lm	Product Data	
Chromaticity Coordinate X (Nom)	332	Full product code	871869641492700
Chromaticity Coordinate Y (Nom)	326	Order product name	MSR 125 HR 1CT/4
Correlated Color Temperature (Nom)	6000 K	EAN/UPC - Product	8718696414927
Luminous Efficacy (rated) (Nom)	75 lm/W	Order code	928060205115
Color Rendering Index (Nom)	92	Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	4
Power (Rated) (Nom)	125 W	Material Nr. (12NC)	928060205115
Lamp Current (Nom)	1.9 A		


MSR Hot Restrike

Net Weight (Piece)	18.000 g
--------------------	----------

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




MSR 125 HR

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 125 HR	17 mm	4.0	38 mm	40 mm	39 mm	77 mm	24 mm	23.5	23 mm
1CT/4		mm						mm	

Photometric data

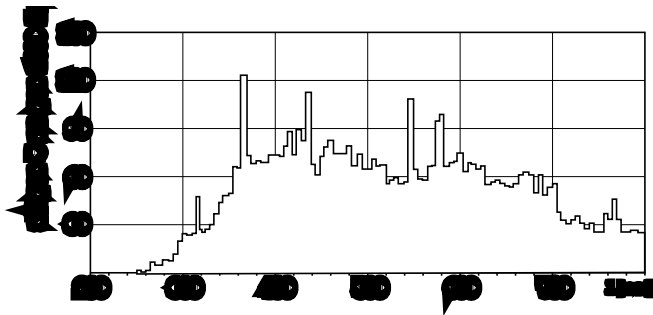

MSR 125, 200, 250, 400, 575, 1200 (C), 2500, 4000, 6000, 12000, 18000 HR

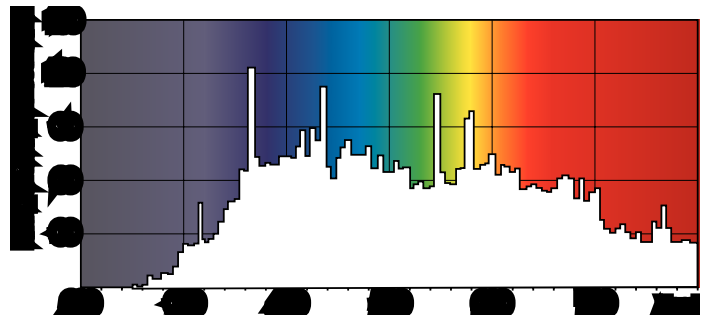

MSR Hot Restrike

