

# PHILIPS

## Lighting



# MSD Platinum (Touring/Stage)

## MSD Platinum 200 Flex 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

### Product data

General Information	
Cap-Base	- [-]
Operating Position	Universal [ Universal]
Life to 50% Failures (Nom)	2000 h
Life to 50% Failures entertainment cycle (Nom)	6000 h

Light Technical	
Color Code	2
Initial lumen (Nom)	12000 lm
Chromaticity Coordinate X (Nom)	0.300
Chromaticity Coordinate Y (Nom)	0.305
Correlated Color Temperature (Nom)	7800 K
Color Rendering Index (Nom)	-

Operating and Electrical	
Power (Rated) (Nom)	240 W
Voltage (Min)	55 V

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Cap-Base Information	na [-]

Luminaire Design Requirements	
Pinch Temperature (Max)	350 °C



Product Data	
Order product name	MSD Platinum 200 Flex 1CT/8
EAN/UPC - Product	8718696808139
Order code	341297
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928495705314
Net Weight (Piece)	71.200 g

## MSD Platinum (Touring/Stage)

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050


### Dimensional drawing




Product	D (max)	O	C (max)	T
MSD Platinum 200 Flex 1CT/8	56.5 mm	0.8 mm	60 mm	7 mm

MSD Platinum 200 Flex

### Photometric data

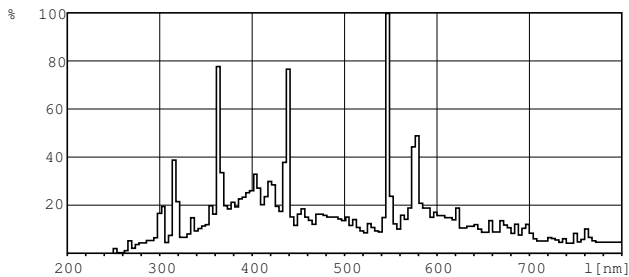

MSD

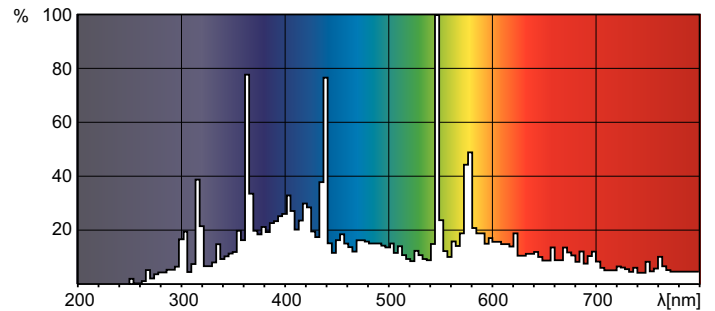

MSD

