



PAR30/PAR20 LED

12PAR30L/EXPERTCOLOR/F25/927/DIM

Philips PAR30S LED Single Optic Lamps with AirFlux Technology provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data


General Information		Wattage Equivalent	
Cap-Base	E26 [Single Contact Medium Screw]	75 W	
Nominal Lifetime (Nom)	40000 h	Starting Time (Nom)	0.5 s
Switching Cycle	50000X	Warm Up Time To 60% Light (Nom)	0.5 s
Technical Type	12-75W	Power Factor (Nom)	0.9
		Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	927	T-Case Maximum (Nom)	85 °C
Beam Angle (Nom)	25 °		
Luminous Flux (Nom)	850 lm	Controls and Dimming	
Luminous Flux (Rated) (Nom)	850 lm	Dimmable	Yes
Luminous Intensity (Nom)	4200 cd		
Color Designation	Warm White (WW)	Approval and Application	
Rated Beam Angle	25 °	Suitable For Accent Lighting	Yes
Correlated Color Temperature (Nom)	2700 K		
Luminous Efficacy (rated) (Nom)	66.67 lm/W	Product Data	
Color Consistency	<6	Order product name	12PAR30L/EXPERTCOLOR/F25/927/DIM
Color Rendering Index (Nom)	95	EAN/UPC - Product	046677470951
LLMF At End Of Nominal Lifetime (Nom)	70 %	Order code	929001340904
		Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	6
Input Frequency	60 Hz	Material Nr. (12NC)	929001340904
Power (Rated) (Nom)	12 W	Net Weight (Piece)	0.285 kg
Lamp Current (Nom)	120 mA		

PAR30/PAR20 LED

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.
- CAUTION: Risk of electric shock— do not use where directly exposed to water
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005.


Dimensional drawing




PAR30L 12-75W 850lm 25D 2700K E26 D

Product	D	C
12PAR30L/EXPERTCOLOR/F25/927/DIM	94.8 mm	93.1 mm

Photometric data

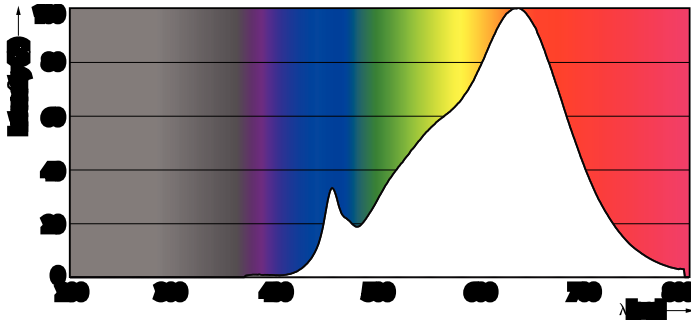

PAR38 120V 17-90W 1150lm 8D 2700K E26 D

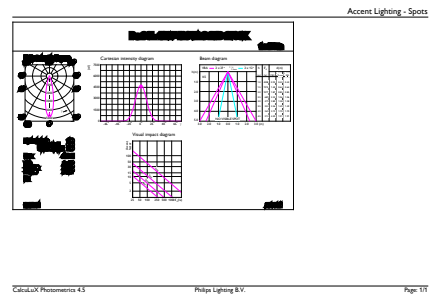

ColorLUX Photometrics 4.3 Philips Lighting B.V. Page 1/1

