

TECHNICAL INFORMATION

Surge Protector Model 80/929

Features

- For use with Satco Hi-Pro Lamps
- Extra protection for industrial/commercial applications
- RoHS Compliant
- IP67 Rated





Indicator light


Surge Protector

Item Number	Operating Voltage	Max Operating Voltage	Nominal Discharge Current	Max Discharge Current	Protection Level	Nominal Discharge Voltage	Max Discharge Voltage
80/929	100-277V	320V AC	5kA	10kA	1.1kV	10kA	20kA
Frequency	Response Time	Casing Protection Grade	Size	Use Environment Temperature	Testing Standard		
50~60Hz	25ns	IP67	21x36x64mm	-40° ~ +176°F	GB 18802.1-2011		

Dimensions

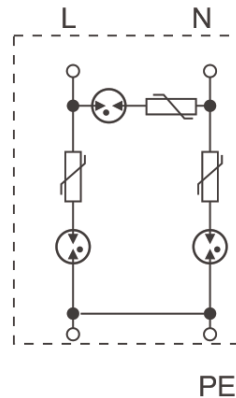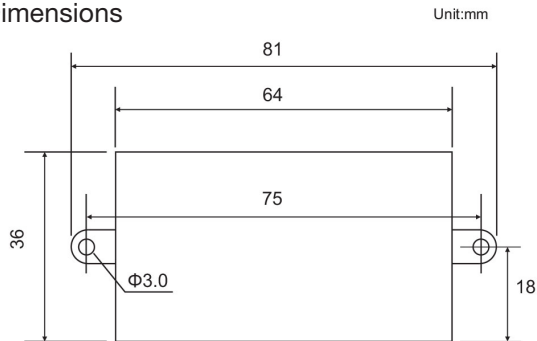

Wiring Diagram

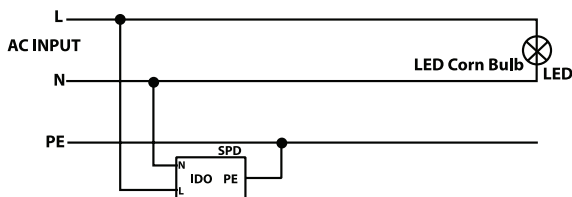

SPD PE ground wire must be the grid PE. The recommended distance between SPD L, N, PE and Hi-Pro LED lamp must not exceed 1 meter.