

EML6

LED Emergency Light

Product Description

The NICOR EML6 emergency light provides a code compliant solution for outdoor and wet location requirements. The UL924 Wet Location listed fixture is made from an ABS corrosion-resistant enclosure, making it a durable option. The EML6 Series is available in white and features universal wall mounting with the EZ quick connect. Designed with high output LEDs, the EML6 has exceptional light distribution and a maintenance-free nickel-cadmium battery.

Construction

- Injection molded thermoplastic ABS housing, UL-94-V-0 rated material
- Injection molded clear polycarbonate face
- Adjustable heads for aiming light where required:
 - Vertical head tilt: 100°
 - Horizontal head rotation: 100°

Optical System

- Each head is designed with an optical lens to smooth the beam pattern and minimize pixilation

Electrical

- Operating temperature rating of 5°F to 104°F (-15°C to 40°C)
- Maintenance-free nickel-cadmium battery provides 90-minute emergency operation
 - Recharges in 24 hours
- 120/277VAC Dual Voltage Operation, 60Hz input
- Includes test switch/power indicator light

LED

- LED lamps provide an average luminous flux of 265 lumens

Finish

- White textured thermoplastic housing

Installation

- Surface wall mounting
- Universal mounting plate with EZ quick connect
- Universal knockout pattern provided on housing for surface mount install

Compliance

- UL Listed for wet locations
- UL 924

Warranty

- 2-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

PRODUCT INFORMATION


Input Voltage:	120/277 VAC
Power Draw:	2.4 W
Emergency Battery:	90 Minutes

Project _____

Catalog _____

Type _____

Date _____

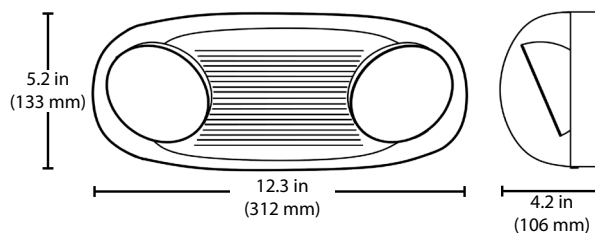

Ordering Information

Example: EML61UNVWH

Series	Version	Voltage	Housing Color
EML6	1 (Version 1)	UNV (120/277VAC)	WH (White)

Specifications and dimensions subject to change without notice