





GE  
Lighting

## 14673 - LU100/ECO/NC

GE Ecolux® Lucalox® High Pressure Sodium ED23.5

- Passes TCLP, which can lower disposal costs.
- Non-cycling feature makes locating and replacing end-of-life lamps quick and easy

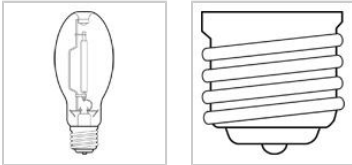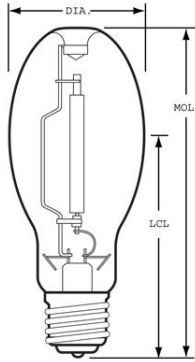

### CAUTIONS & WARNINGS

#### Caution

- Risk of Burn
  - Allow lamp to cool before handling.
  - Do not turn on lamp until fully installed.
- Lamp may shatter and cause injury if broken
  - Wear safety glasses and gloves when handling lamp.
  - Do not use lamp if outer glass is scratched or broken.
  - Dispose of lamp in a closed container.
  - Do not use excessive force when installing lamp.

#### Warning

- Contains sodium – chemical burn risk
  - Avoid skin contact with broken pieces.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in fixture rated for this product.
- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
  - Do not use where directly exposed to water or outdoors without an enclosed fixture.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Do not exceed rated voltage.
  - Do not use where directly exposed to water or outdoors without an enclosed fixture.
  - Do not use lamp if outer glass is scratched or broken.
  - Use only properly rated ballast.
  - Do not store flammable materials near/below lamp.
  - Do not turn on lamp until fully installed.

### GRAPHS & CHARTS

Graphs\_Spectral Power Distribution

### GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - High Pressure Sodium ED23.5
Bulb	ED23.5
Base	Mogul Screw (E39)
Bulb Finish	Clear
Rated Life	30000.0 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
LEED-EB MR Credit	4 picograms Hg per mean lumen hour
Additional Info	TCLP compliant

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	9800.0
Mean Lumens	8820.0
Nominal Initial Lumens per Watt	98
Color Temperature	2000.0 K
Color Rendering Index (CRI)	23.0
Effective Arc Length	1.5 in

### ELECTRICAL CHARACTERISTICS

Wattage	100.0
Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast) (MIN)	110.0 V
Warm Up Time to 90% (MIN)	3.0 min
Warm Up Time to 90% (MAX)	4.0 min
Hot Restart Time to 90%	5.0 min

### DIMENSIONS

Maximum Overall Length (MOL)	7.7500 in(196.8 mm)
Nominal Length	7.750 in(196.8 mm)
Bulb Diameter (DIA)	2.937 in(74.6 mm)
Light Center Length (LCL)	5.000 in(127.0 mm)

### PRODUCT INFORMATION

Product Code	14673
Description	LU100/ECO/NC
ANSI Code	S54
Standard Package	Case
Standard Package GTIN	10043168146736
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168146739

