


48450 - CSR200/DE

GE Quartz Metal Halide T4.5 - Stage & Studio

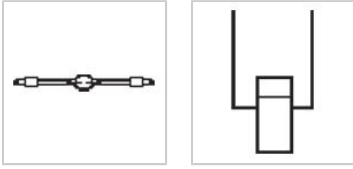

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.
 - Dispose of lamp in a closed container.
- Risk of Burn
 - Allow lamp/fixture to cool before handling.
 - Turn power off before installing lamp.

Warning

- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Use in enclosed fixture rated for this product.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not exceed 110% of rated voltage.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Quartz Metal Halide
Bulb	T4.5
Base	X515
Rated Life (TYP)	300.0 h
LEED-EB MR Credit	2778 picograms Hg per mean lumen hour
Primary Application	Stage & Studio

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	16000.0
Mean Lumens	14400.0
Nominal Initial Lumens per Watt	80
Color Temperature	6000.0 K
CIE Color x	0.323
CIE Color y	0.325

ELECTRICAL CHARACTERISTICS

Wattage	200.0
Voltage	80.0
Burn Position	Horizontal $\pm 15^\circ$

DIMENSIONS

Maximum Overall Length (MOL)	2.9500 in(74.9 mm)
Bulb Diameter (DIA)	0.563 in(14.3 mm)

PRODUCT INFORMATION

Product Code	48450
Description	CSR200/DE
Standard Package	Case
Standard Package GTIN	10043168484500
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168484503